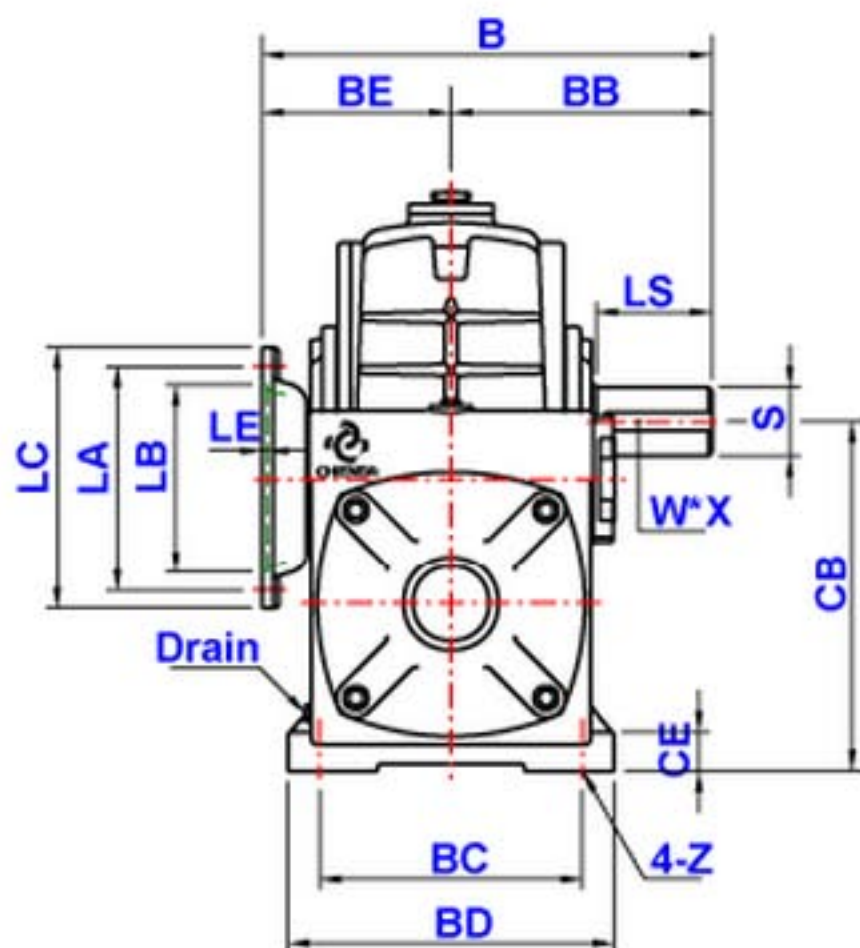
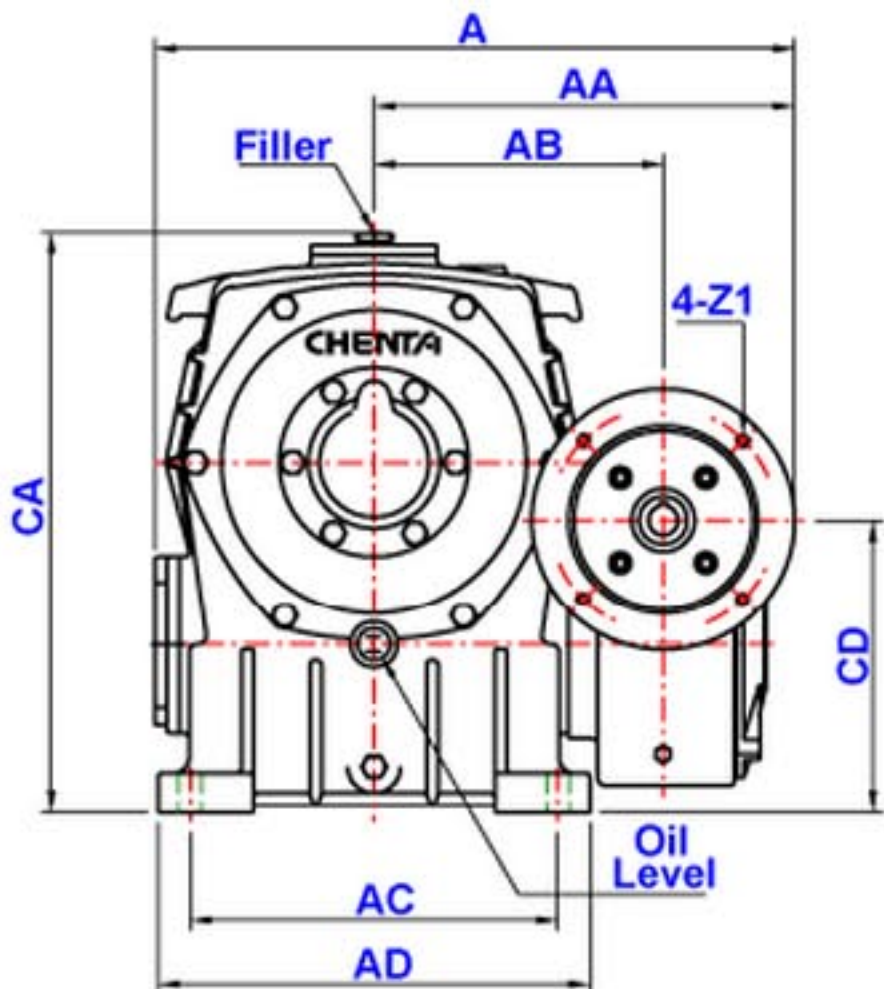


Input-Bore

速比： 1/100 ~ 1/3600

單位：mm

Size	A	AA	AB	AC	AD	B	BB	BC	BD	BE	CA	CB	CD	CE	Z	Input Bore		
																U	T	V
100/155	545	357	257	320	385	382	242	220	280	140	487	290	235	32	20	24	8	27.3
	574	382				384				142						28		31.3
120/175	608	400	275	350	410	428	248	250	310	180	553	335	280	37	22	28	8	31.3
120/200	687	437	312.5	350	420	485	305	280	350	180	637	390	310	30	22	28	8	31.3
135/225	692	440	315	390	470	540	345	330	410	195	680	415	325	35	27	28	8	31.3
	717	465				563				218						38	10	41.3
155/250	817	515	365	440	520	596	360	380	440	236	742	450	355	40	27	38	10	41.3

Size	Output Shaft			Flange					HP	Oil	Weight
	LS	S	W * X	LA	LB	LC	LE	Z1			
100/155	100	60	15*5	165	130	200	5	M10	2	6.1	138.7
				215	180	250		M12	3		
120/175	110	65	18*6	215	180	250	5	M12	3 5	9.2	199.6
120/200	125	70	20*7	215	180	250	5	M12	5	15	261
135/225	140	80	20*7	215	180	250	5	M12	5	17	365
				265	230	300		15	7.5		
155/250	145	90	24*8	265	230	300	5	15	10	22	425