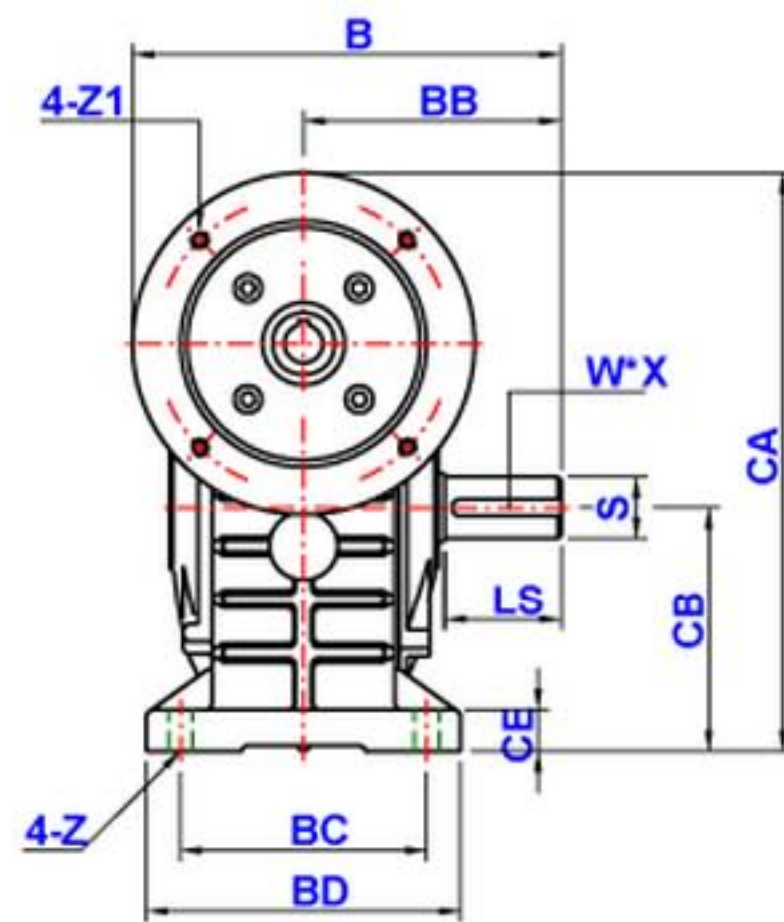
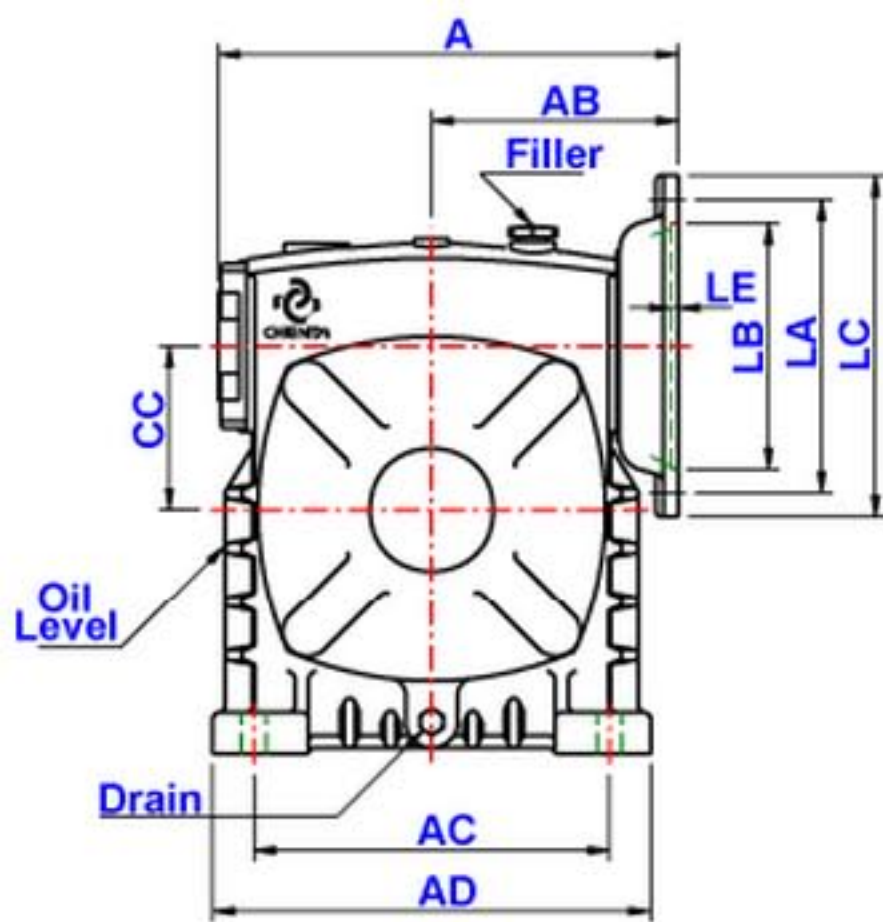


速比： 1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Input-Bore

Size	A	AB	AC	AD	B	BB	BC	BD	CA	CB	CC	CE	Z	Input Bore		
														U	T	V
50	170	97	110	140	175	95	95	120	210	80	50	18	11	11	4	12.8
														14	5	16
60	177	97	120	150	190	110	105	130	230	90	60	20	11	11	4	12.8
														14	5	16
70	213	118	150	190	210	130	115	150	255	105	70	22	15	14	5	16
	215	120			230				275					19	6	21.8
80	234	130	180	220	240	140	135	170	300	120	80	20	15	19	6	21.8
														24	8	27.3
100	273	140	220	270	270	170	155	190	350	150	100	25	15	24	8	27.3
	278	142			295				375					28		31.3
120	339	180	260	320	315	190	180	230	425	180	120	30	18	28	8	31.3
135	370	195	290	350	335	210	200	250	475	215	135	30	18	28	8	31.3
	390	218			360				500					38	10	41.3

Size	Output Shaft			Flange					HP	Oil	Weight
	LS	U	W * X	LA	LB	LC	LE	Z1			
50	40	17	5 * 3	130	110	160	4	M8	0.25 0.50	0.22	7.2
60	50	22	7 * 4	130	110	160	4	M8	0.25 0.50	0.32	10
70	60	28	7 * 4	130	110	160	4	M8	0.50	0.55	15
				165	130	200	5	M10	1.00		
80	65	32	10 * 4.5	165	130	200	4	M10	1.00 2.00	0.77	20.2
100	75	38	10 * 4.5	165	130	200	5	M10	2.00	1.53	39.5
				215	180	250		M12	3.00		
120	85	45	12 * 4 5	215	180	250	5	M12	3.00 5.00	2.4	65
135	95	55	15 * 5	215	180	250	5	M12	5.00	3.25	85.2
				265	230	300		15	7.50		