


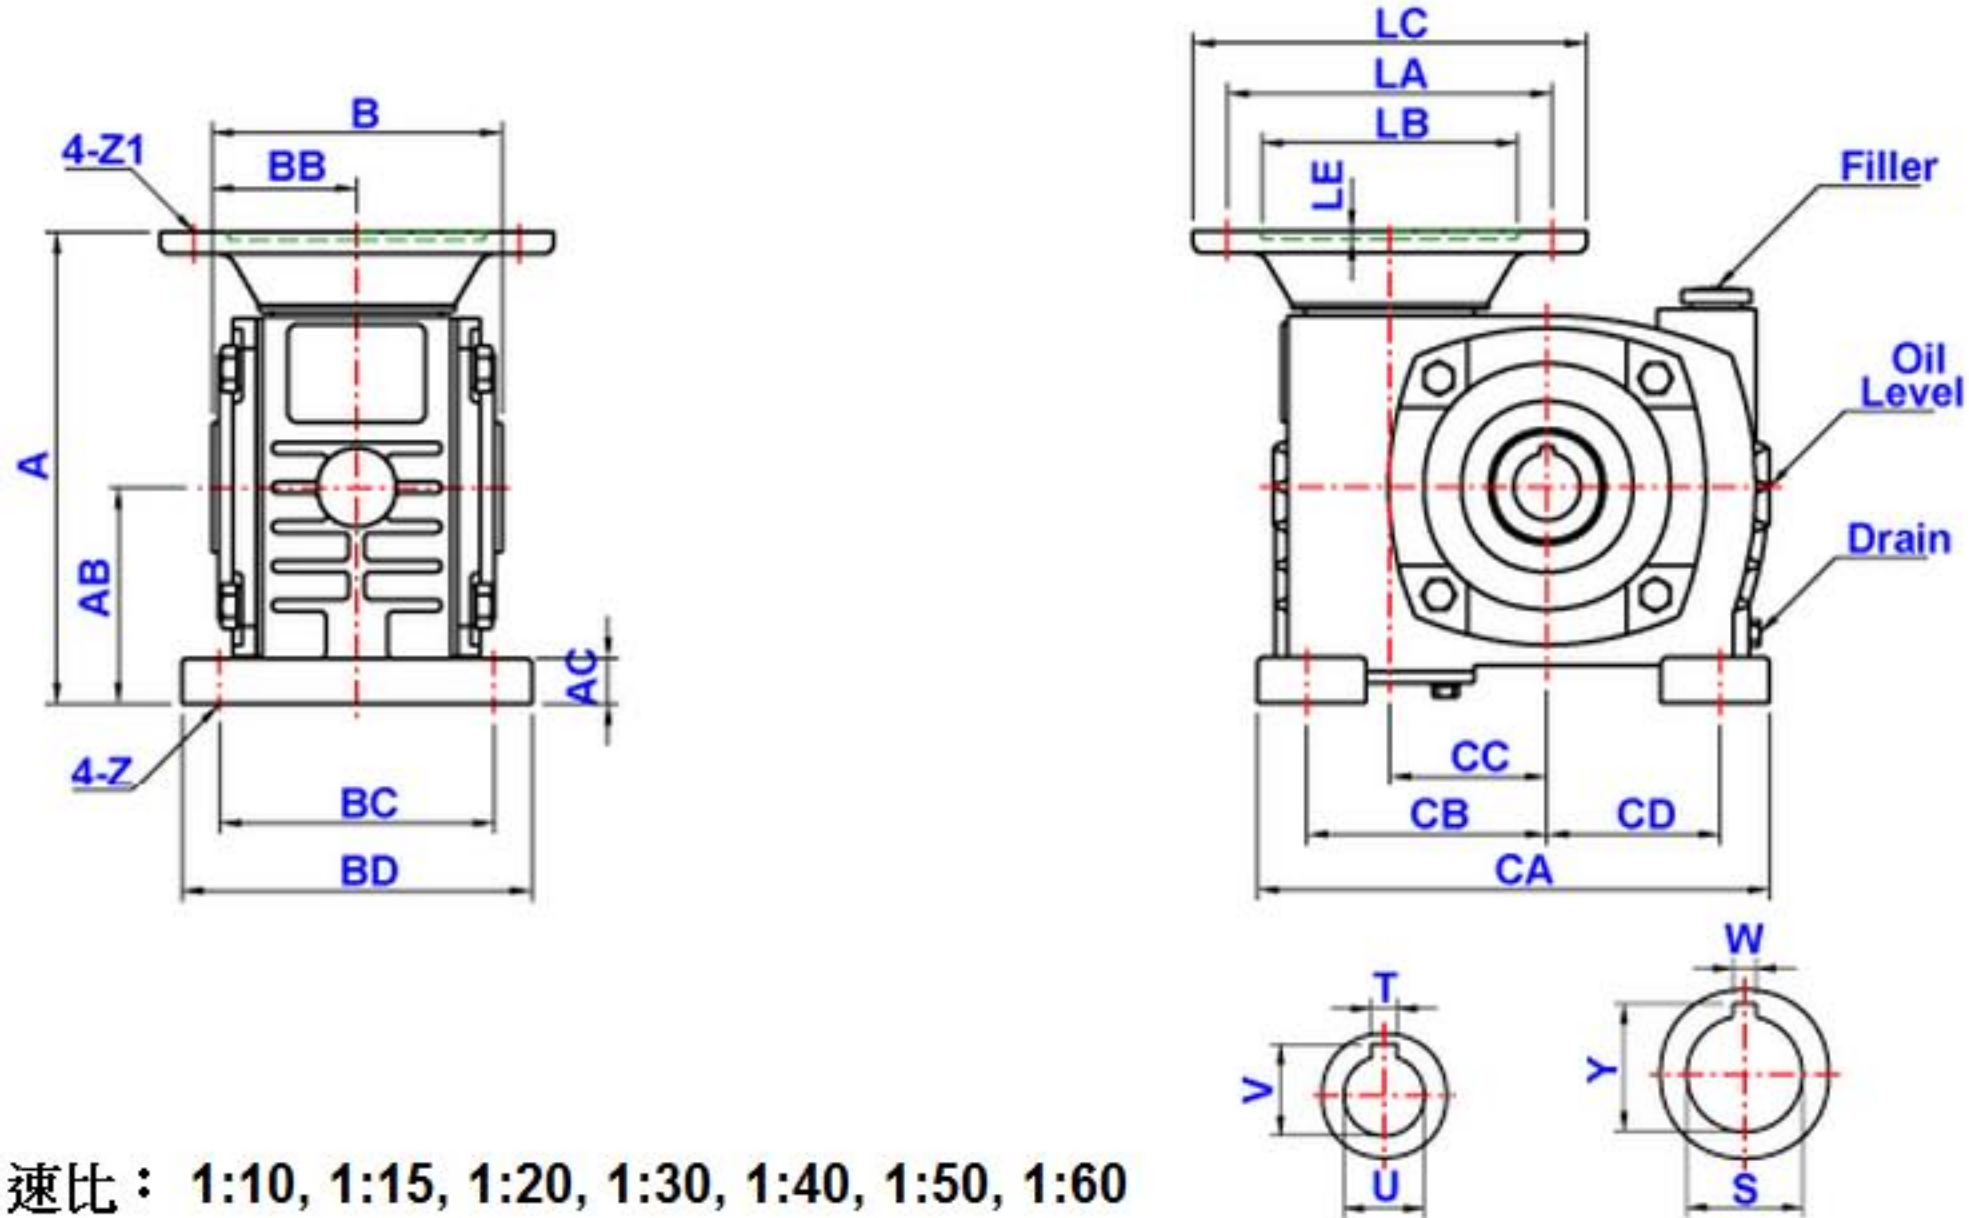

速比： 1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Size	A	AB	AC	B	BB	BC	BD	CA	CB	CC	CD	Z	Input Bore		
													U	T	V
50	162	70	15	110	55	100	125	161	77	50	53	11	11	4	12.8
													14	5	16.3
60	187	90	20	117	58.5	105	136	205	98	60	67	10	11	4	12.8
													14	5	16.3
70	228	110	20	130	65	120	155	196	100	70	55	15	14	5	16.3
	230												19	6	21.8
80	235	105	20	144	72	125	160	264	125	80	90	15	19	6	21.8
													24	8	27.3
100	277	135	25	175	87.5	170	205	320	157	100	115	15	24	8	27.3
	279												28		31.3
120	310	155	30	200	100	180	230	352	170	120	120	18	28	8	31.3
135	365	170	30	230	115	200	250	390	200	135	130	18	28	8	31.3
	388												30	10	41.5

Size	Output Bore			Flange					HP	Oil	Weight
	S	W	Y	LA	LB	LC	LE	Z1			
50	20	5	22.3	130	110	160	4	M8	0.25 0.5	0.3	9
60	25	7	28	130	110	160	4	M8	1/4 1/2	0.5	13
70	30	8	33.3	130	110	160	4	M8	1/2	1	16
				165	130	200	5	M10	1		
80	35	10	38.5	165	130	200	5	M10	1 2	1.2	23
100	40	12	43.5	165	130	200		M10	2	2.8	40
				215	180	250	5	M12	3		
120	45	12	48.5	215	180	250	5	M12	3 5	4	58
135	60	15	65	215	180	250		M12	5	5.5	70
				265	230	300	5	15	7.5		