


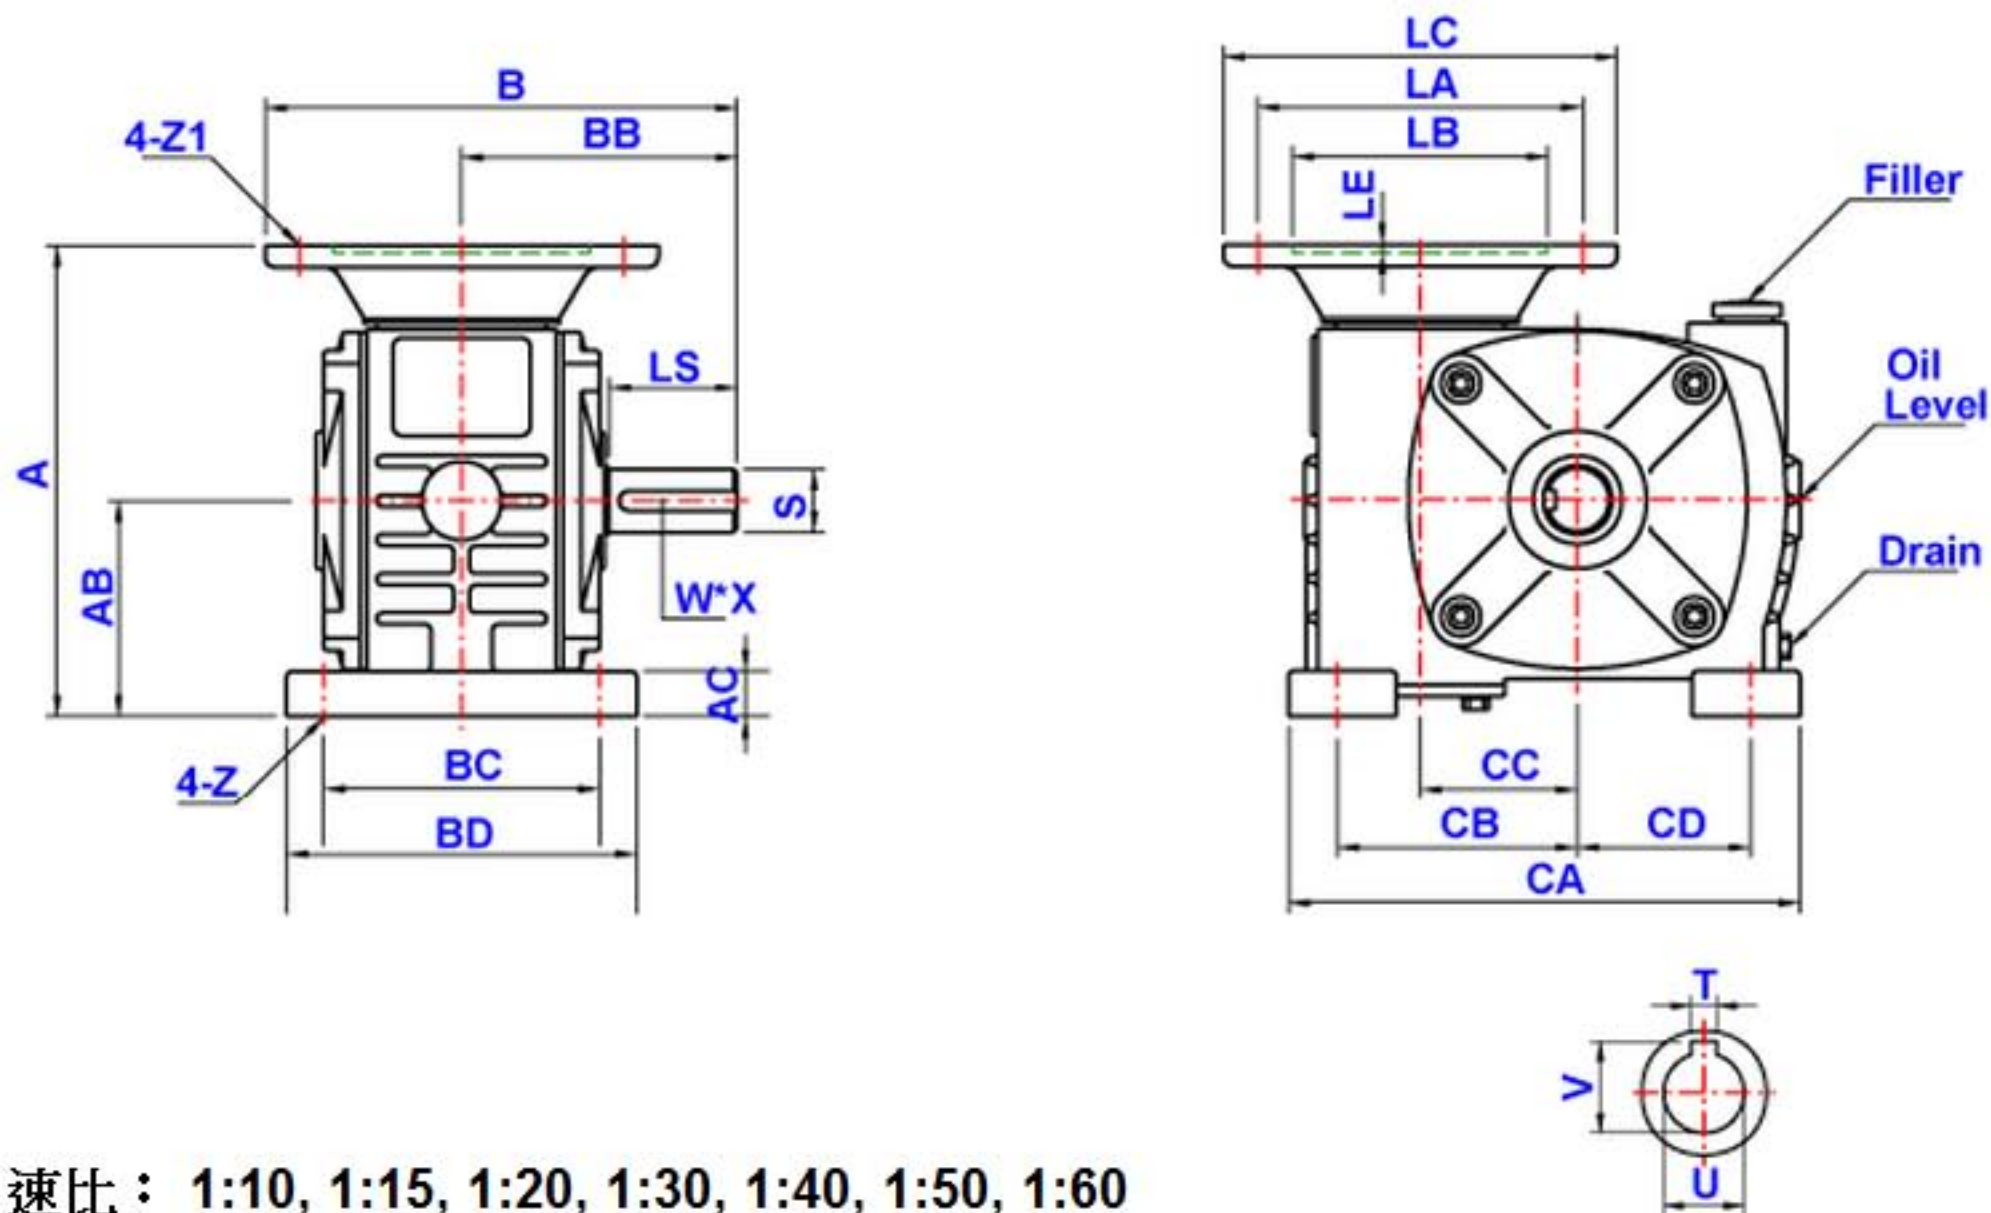

速比： 1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Input-Bore

Size	A	AB	AC	B	BB	BC	BD	CA	CB	CC	CD	Z	Input Bore		
													U	T	V
50	162	70	15	175	95	100	125	161	77	50	53	11	11	4	12.8
													14	5	16.3
60	187	90	20	190	110	105	136	205	98	60	67	11	11	4	12.8
													14	5	16.3
70	228	110	20	210	130	120	155	196	100	70	55	15	14	5	16.3
	230			240									19	6	21.8
80	235	105	20	240	140	125	160	264	125	80	90	15	19	6	21.8
													24	8	27.3
100	277	135	25	270	170	170	205	320	157	100	115	15	24	8	27.3
	279			295									28		31.3
120	335	155	30	315	190	180	230	352	170	120	120	18	28	8	31.3
135	365	170	30	335	210	200	250	390	200	135	130	18	28	8	31.3
	388			360									38	10	41.5

Size	Output Shaft			Flange					HP	Oil	Weight
	LS	S	W * X	LA	LB	LC	LE	Z1			
50	40	17	5 * 3	130	110	160	4	M8	1/4 1/2	0.3	9
60	50	22	7 * 4	130	110	160	4	M8	1/4 1/2		
70	60	28	7 * 4	130	110	160	4	M8	1/2	1	16
				165	130	200	5	M10	1		
80	65	32	10 * 4.5	165	130	200	5	M10	1 2	1.2	23
100	75	38	10 * 4.5	165	130	200	5	M10	2		
				215	180	250		M12	3	2.8	40
120	85	45	12 * 4.5	215	180	250	5	M12	3 5	4	58
135	95	55	12 * 4.5	215	180	250	5	M12	5		
				265	230	300		15	7.5	5.5	70