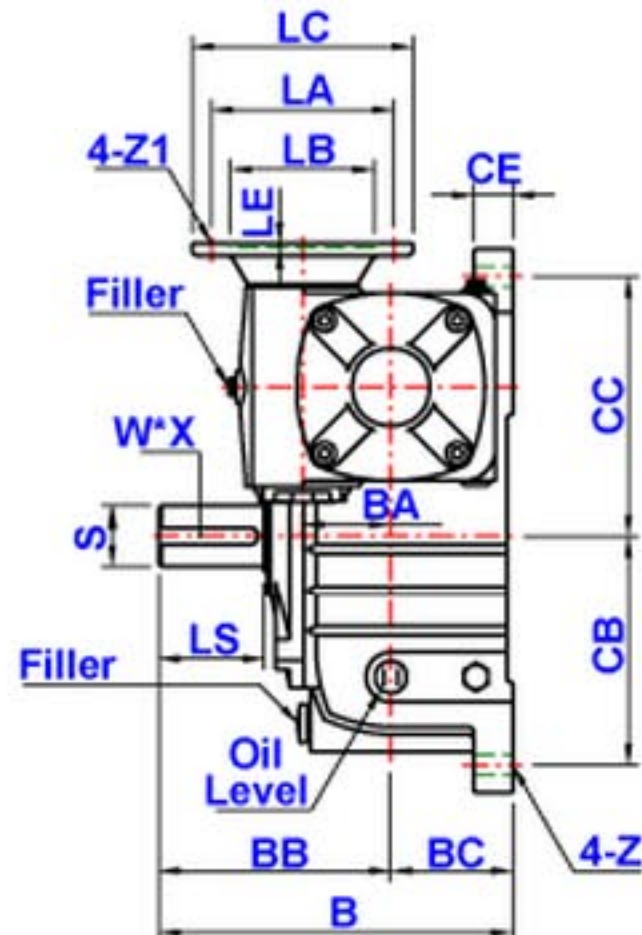
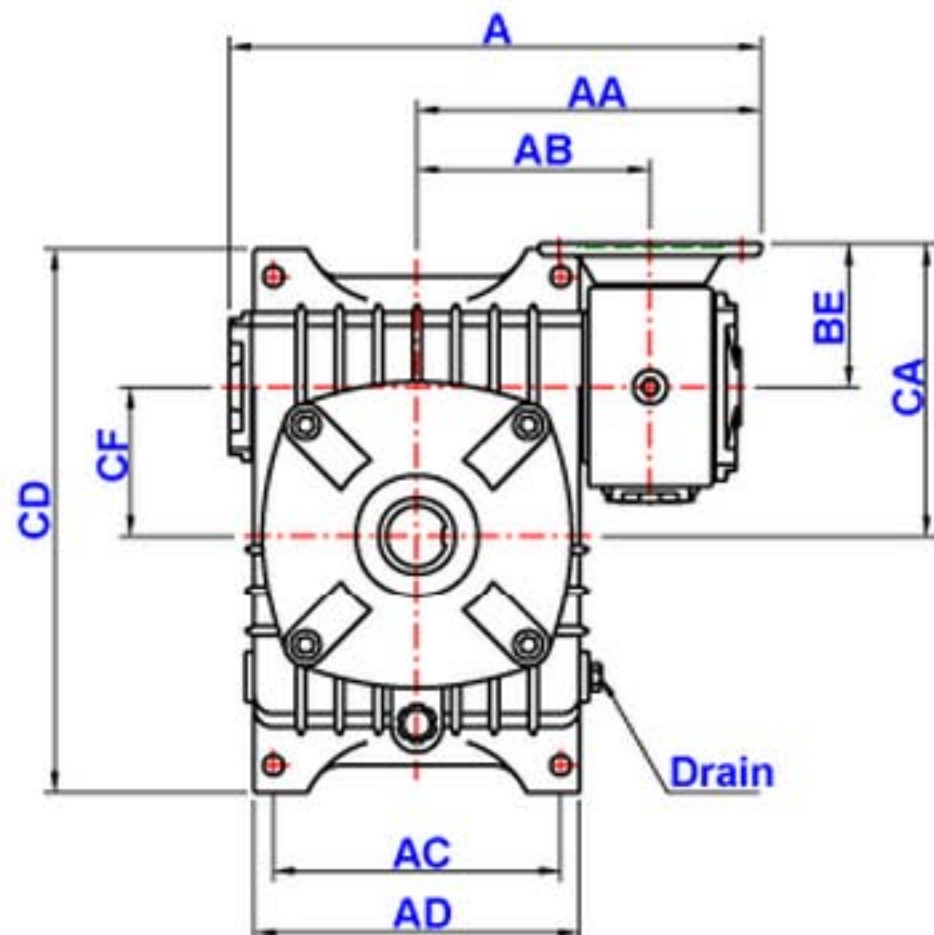


Input-Bore

速比：1/100 ~ 1/3600

單位：mm

Size	A	AA	AB	AC	AD	B	BA	BB	BC	BE	CA	CB	CC	CD	CE	CF	Z
50/80	317	212	132	140	176	213	50	140	73	97	177	130	150	320	20	80	15
60/100	378	241	161	190	226	260	60	170	90	97	197	155	180	375	30	100	15
70/120	428	272	192	220	266	290	70	190	100	118	238	185	215	450	30	120	18
	448	292								120	240						
80/135	480	311	211	260	295	320	80	210	110	130	265	210	235	495	30	135	18
100/155	550	357	257	290	336	382	100	242	140	140	277	145	265	456	30	155	20
	574	382								142	279						
120/175	607	400	275	320	376	398	120	248	150	180	355	167	293	516	35	175	20

Size	Input Bore			Output Shaft			Flange					HP	Oil	Weight
	U	T	V	LS	S	W * X	LA	LB	LC	LE	Z1			
50/80	11	4	12.8	65	32	10 * 4.5	130	110	160	4	M8	0.25	1.8	24
	14	5	16									0.5		
60/100	11	4	12.8	75	38	10 * 4.5	130	110	160	4	M8	0.25	3.8	52
	14	5	16									0.5		
70/120	14	5	16	85	45	12 * 4.5	130	110	160	4	M8	0.5	6	75
	19	6	21.8				165	130	200	5	M10	1		
80/135	19	6	21.8	95	55	15 * 5	165	130	200	5	M10	1	8.5	105
	24	8	27.3									2		
100/155	24	8	27.3	100	60	15 * 5	165	130	200	5	M10	2	12	135
	28		31.3				215	180	250		M12	3		
120/175	28	8	31.3	110	65	18 * 6	215	180	250	5	M12	3/5	15	192