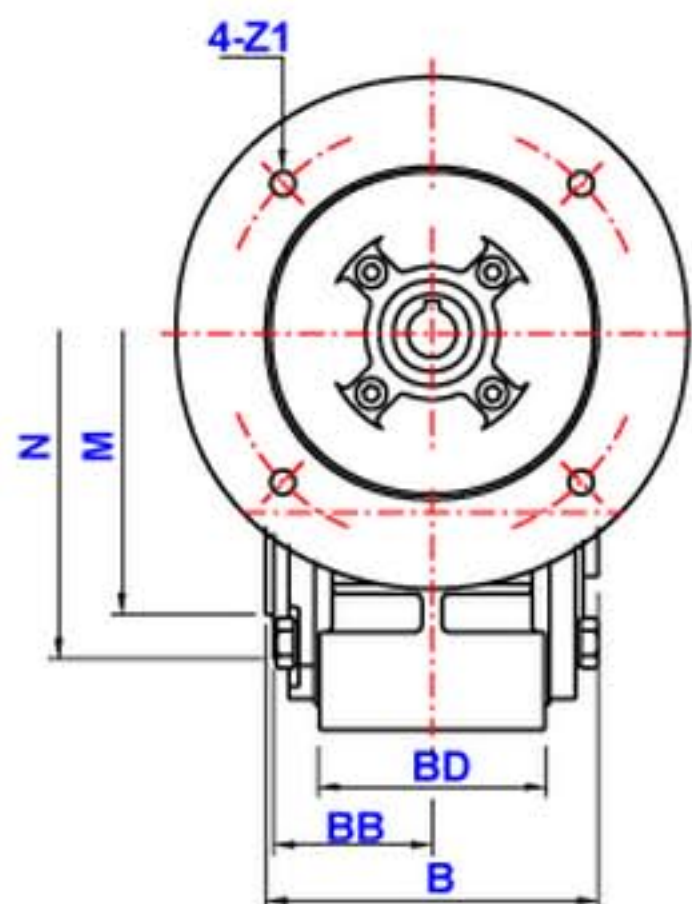
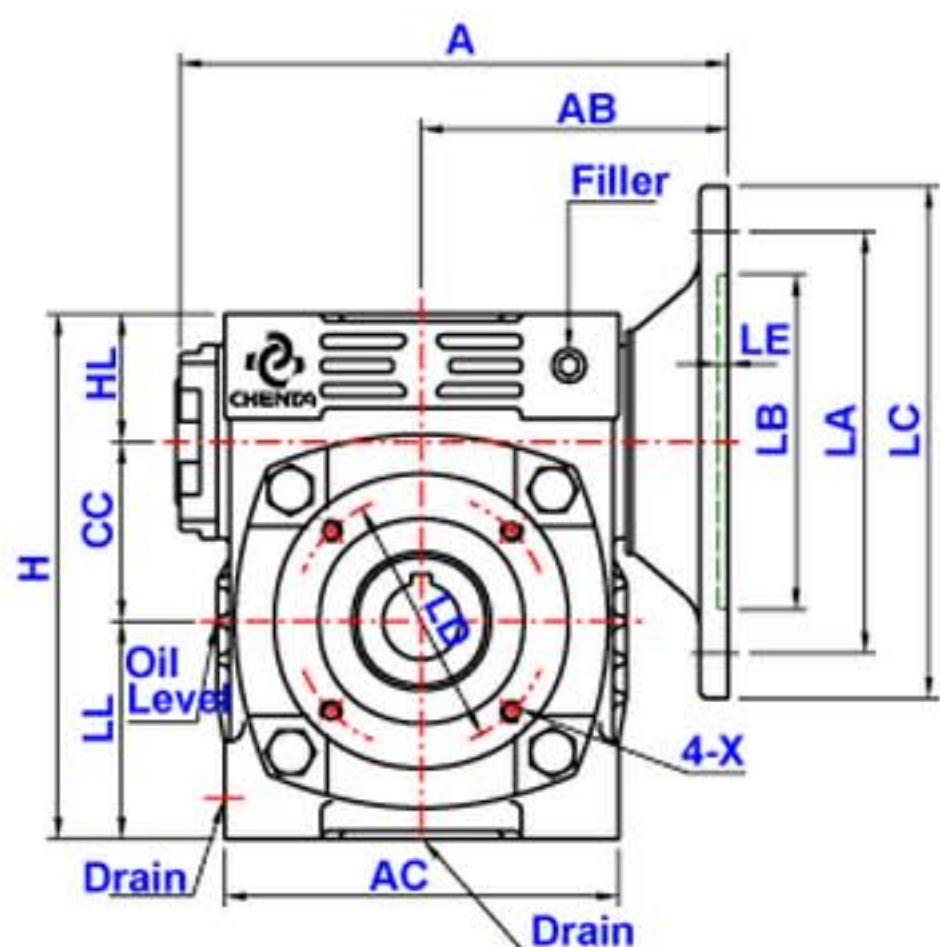


速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Input-Bore

Output-Bore

Size	A	AB	AC	B	BB	BD	CC	M	N	H	HL	LL	LD	X	Input Bore		
															U	T	V
50	174	97	115	110	52	68	50	58	80	150	35	65	70	M6	11	4	12.8
															14	5	16.3
60	177	97	127	117	55.5	78	60	70	96	177	42	75	82	M8	11	4	12.8
															14	5	16.3
70	213	118	154	130	62	88	70	80	115	205	50	85	100	M8	14	5	16.3
	215	120													19	6	21.8
80	235	130	175	144	68	97	80	95	135	232	60	92	115	M10	19	6	21.8
															24	8	27.3
100	273	140	224	175	83	116	100	110	160	310	80	130	130	M12	24	8	27.3
	275	142													28		31.3
120	339	180	264	200	95	136	120	130	200	370	95	155	165	M12	28	8	31.3
135	370	195	310	230	110	154	135	160	233	425	105	185	200	M12	28	8	31.3
	393	218													38	10	41.5

Size	Output Bore			Flange					HP	Oil	Weight
	S	W	Y	LA	LB	LC	LE	Z1			
50	20	5	22.3	130	110	160	4	M8	0.25	0.26	7
									0.5		
60	25	7	28	130	110	160	4	M8	0.25	0.4	9
									0.5		
70	30	8	33.5	130	110	160	4	M8	0.5	0.7	16
				165	130	200	5	M10	1		
80	35	10	38.5	165	130	200	5	M8	1 2	1.15	21
100	40	12	43.5	165	130	200	5	M10	2	2.2	39
				215	180	250		M12	3		
120	45	12	48.5	215	180	250	5	M12	3 5	4.8	52
135	60	15	65	215	180	250	5	M12	5	6.3	74
				265	230	300		15	7.5		