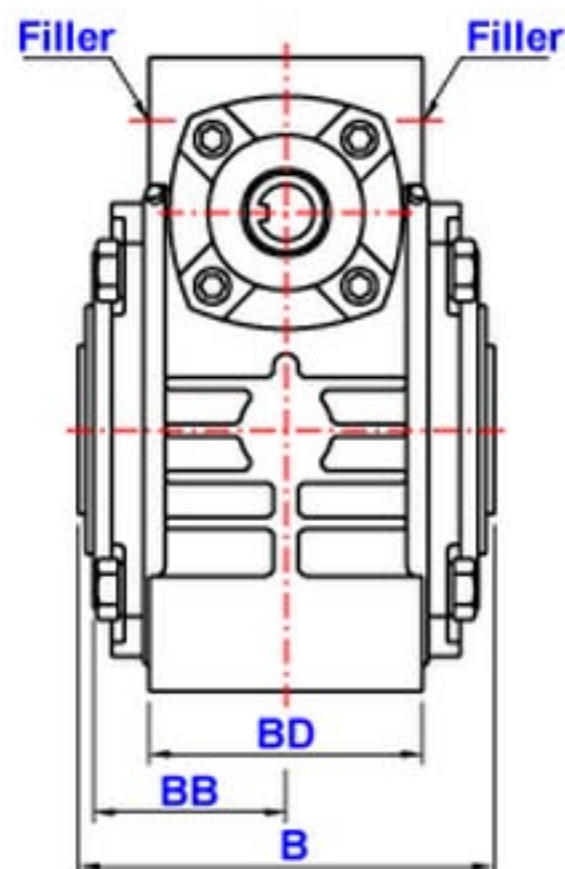
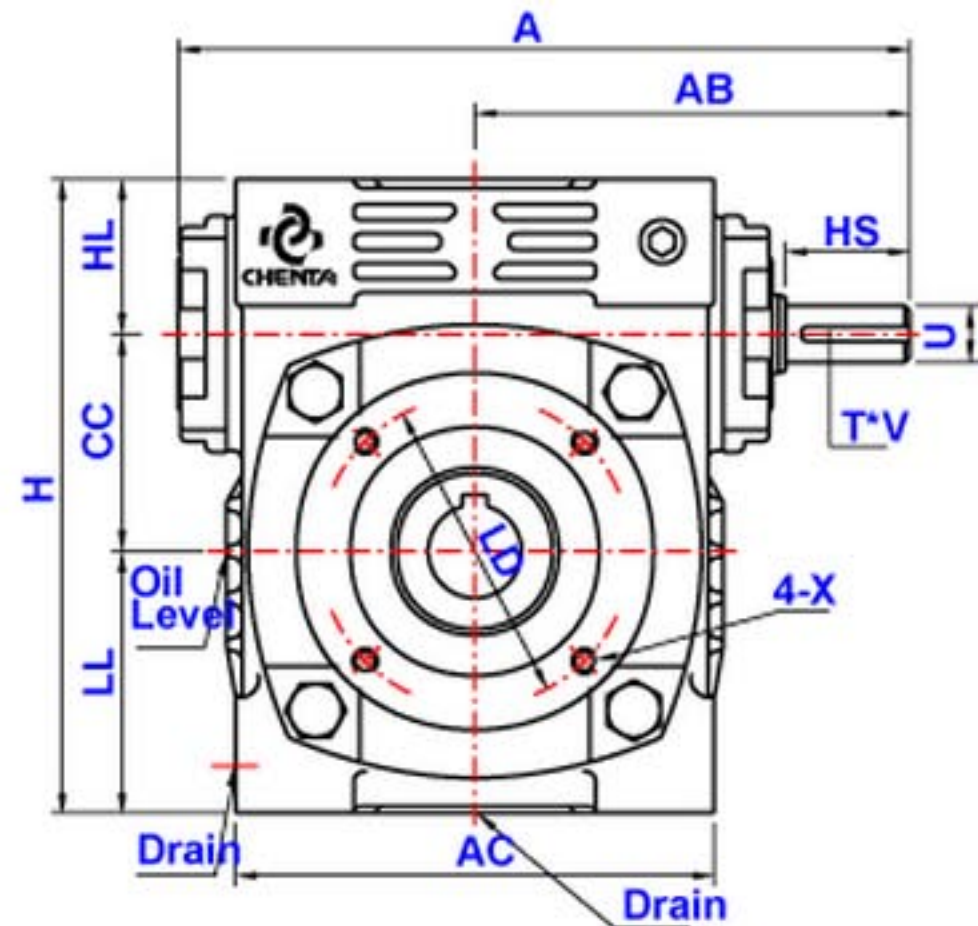


Input-Bore

速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Size	A	AB	AC	B	BB	BD	CC	M	N	H	HL	LL	LD	X
50	181	107	115	110	52	68	50	58	80	150	35	65	70	M6
60	204	124	127	117	55.5	78	60	70	92	177	42	75	82	M8
70	234	140	154	130	62	88	70	80	115	205	50	85	100	M8
80	265	160	175	144	68	97	80	95	135	232	60	92	115	M10
100	325	192	224	175	83	116	100	110	160	310	80	130	130	M12
120	389	230	264	200	95	136	120	130	200	370	95	155	165	M12
135	435	260	310	230	110	154	135	160	233	425	105	185	200	M12

Size	Input Shaft			Output Bore			Oil	Weight
	HS	U	T * V	S	W	Y		
50	30	12	4 * 2.5	20	5	22.3	0.26	6
60	40	15	5 * 3	25	7	28.3	0.4	8
70	40	18	5 * 3	30	8	33.5	0.7	14
80	50	22	7 * 4	35	10	38.5	1.15	19
100	50	25	7 * 4	40	12	43.5	2.2	36
120	65	30	7 * 4	45	12	48.5	4.8	48
135	75	35	10 * 4.5	60	15	65	6.3	70