


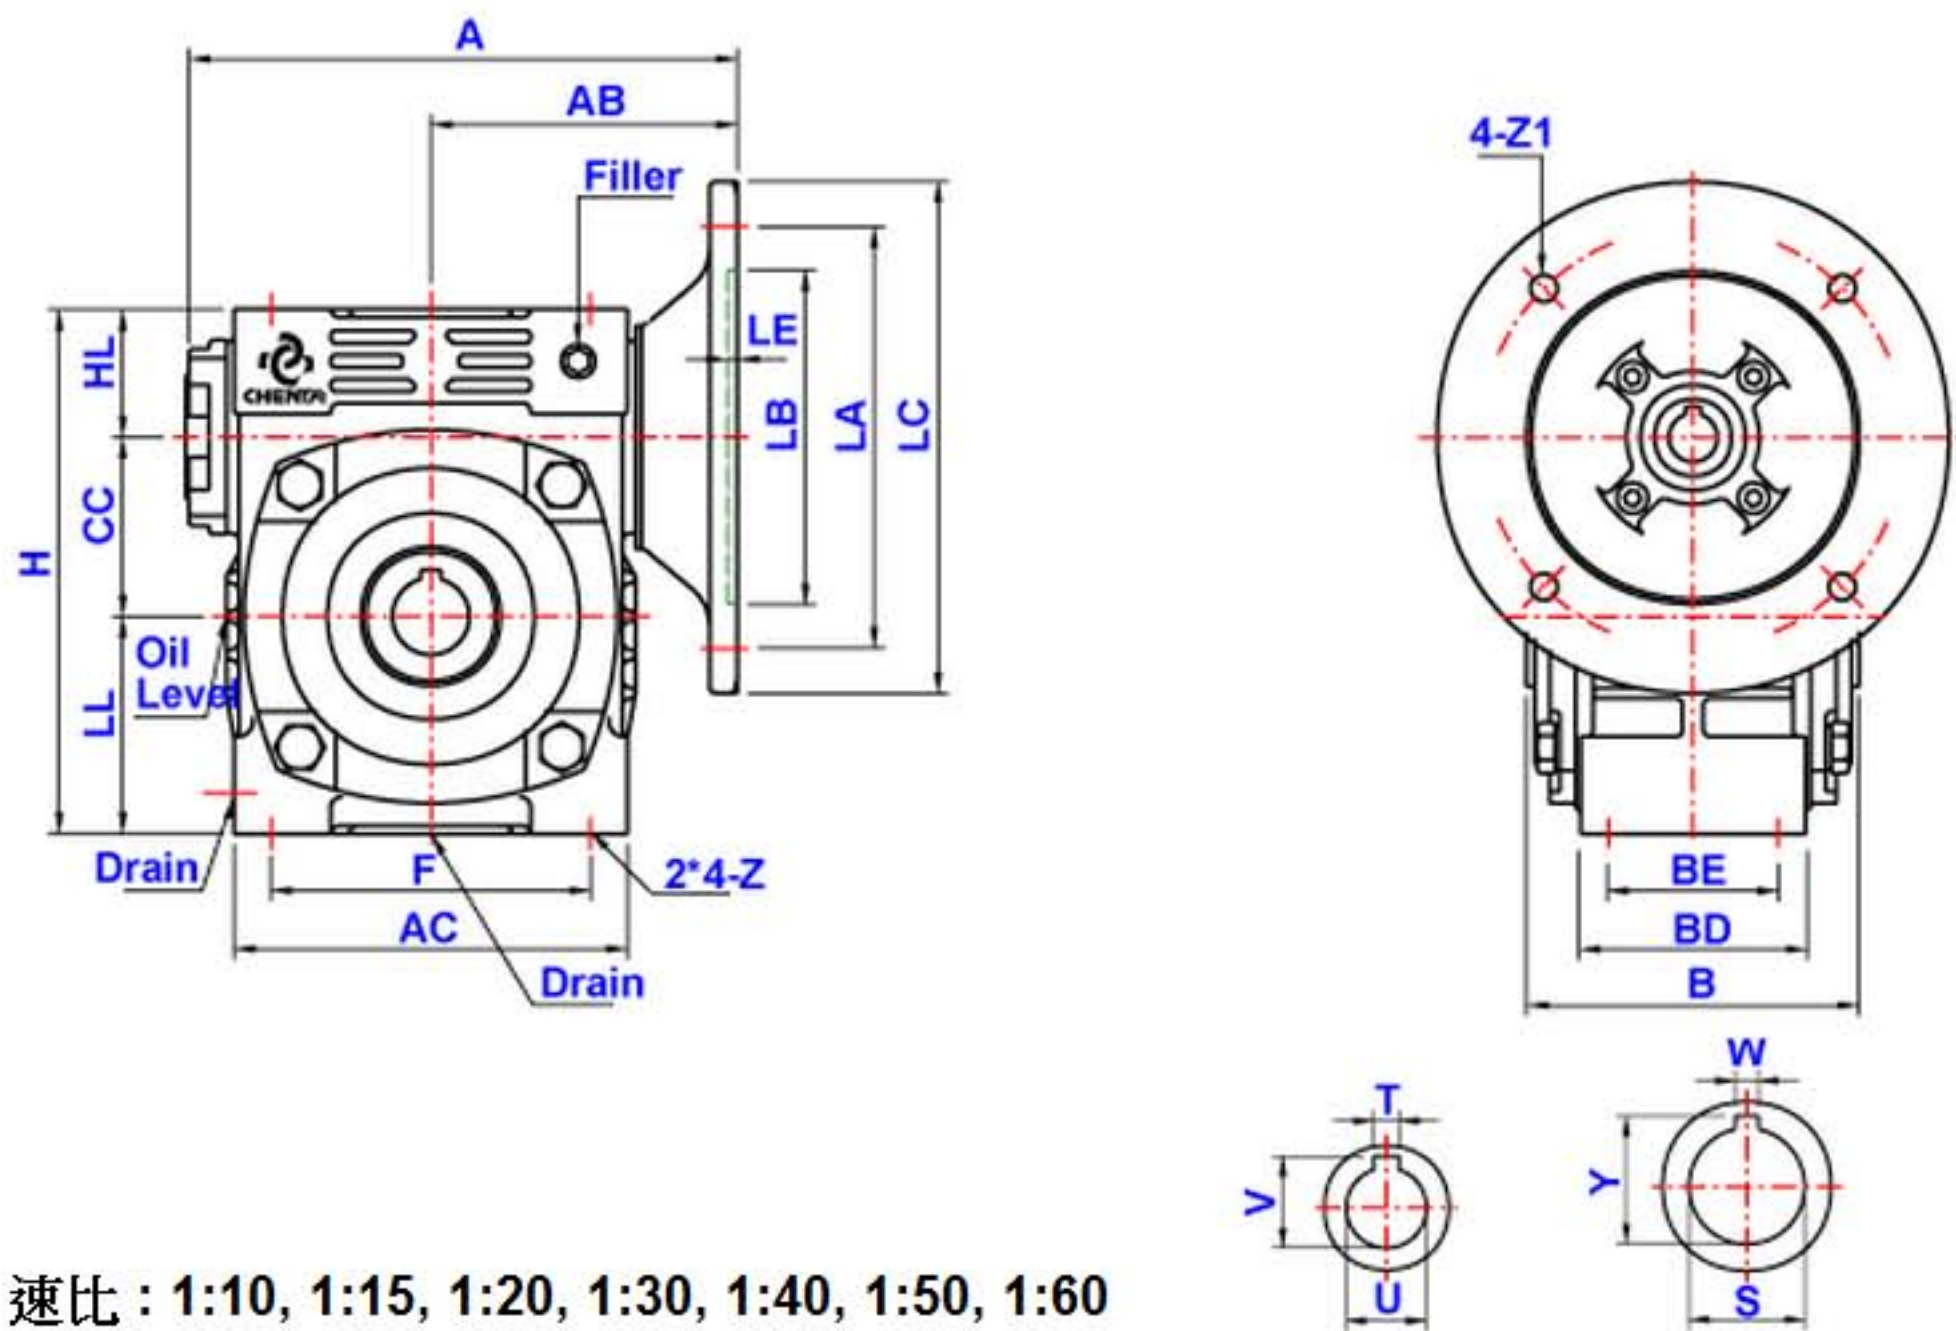

速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Size	A	AB	AC	B	BD	BE	CC	F	H	HL	LL	Z	Input Bore		
													U	T	V
40	139	85	102	110	68	54	40	80	127	34	53	5/16 UNC-18	11	4	12.8
50	174	97	115	110	68	50	50	90	150	35	65	5/16 UNC-18	11	4	12.8
													14	5	16.3
60	177	97	127	117	78	54	60	100	177	42	75	3/8 UNC-16	11	4	12.8
													14	5	16.3
70	213	118	154	130	88	66	70	125	205	50	85	3/8 UNC-16	14	5	16.3
	215	120											19	6	21.8
80	235	130	175	144	97	75	80	145	232	60	92	3/8 UNC-16	19	6	21.8
													24	8	27.3
100	273	140	224	175	116	91	100	187	310	80	130	1/2 UNC-13	24	8	27.3
	275	142											28		31.3
120	339	180	264	200	136	100	120	232	370	95	155	5/8 UNC-11	28	8	31.3
135	370	195	310	230	154	111	130	264	425	105	185	5/8 UNC-11	28	8	31.3
	393	218											38	10	41.5

Size	Output Bore			Flange					HP	Oil	Weight
	S	W	Y	LA	LB	LC	LE	Z1			
40	19	5	21	130	110	160	4	M8	0.25	0.18	6
50	20	5	22.3	130	110	160	4	M8	0.25	0.26	7
									0.5		
60	25	7	28	130	110	160	4	M8	0.25	0.4	9
									0.5		
70	30	8	33.5	130	110	160	4	M8	0.5	0.7	16
				165	130	200	5	M10	1		
80	35	10	38.5	165	130	200	5	M10	1	1.15	21
									2		
100	40	12	43.5	165	130	200	5	M10	2	2.2	39
				215	180	250		M12	3		
120	45	12	48.5	215	180	250	5	M12	3	4.8	52
									5		
135	60	15	65	215	180	250	5	M12	5	6.3	74
				265	230	300		M15	7.5		