
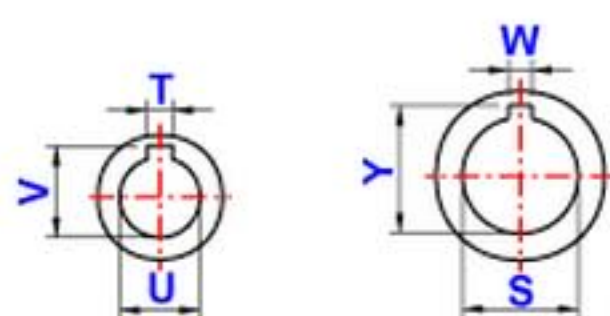
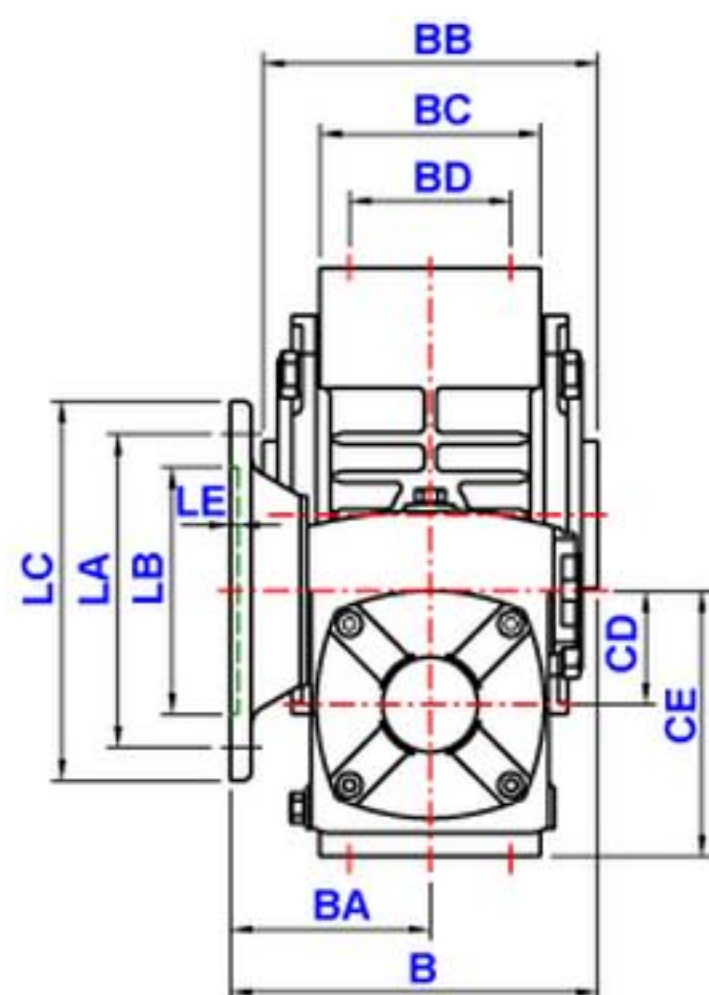


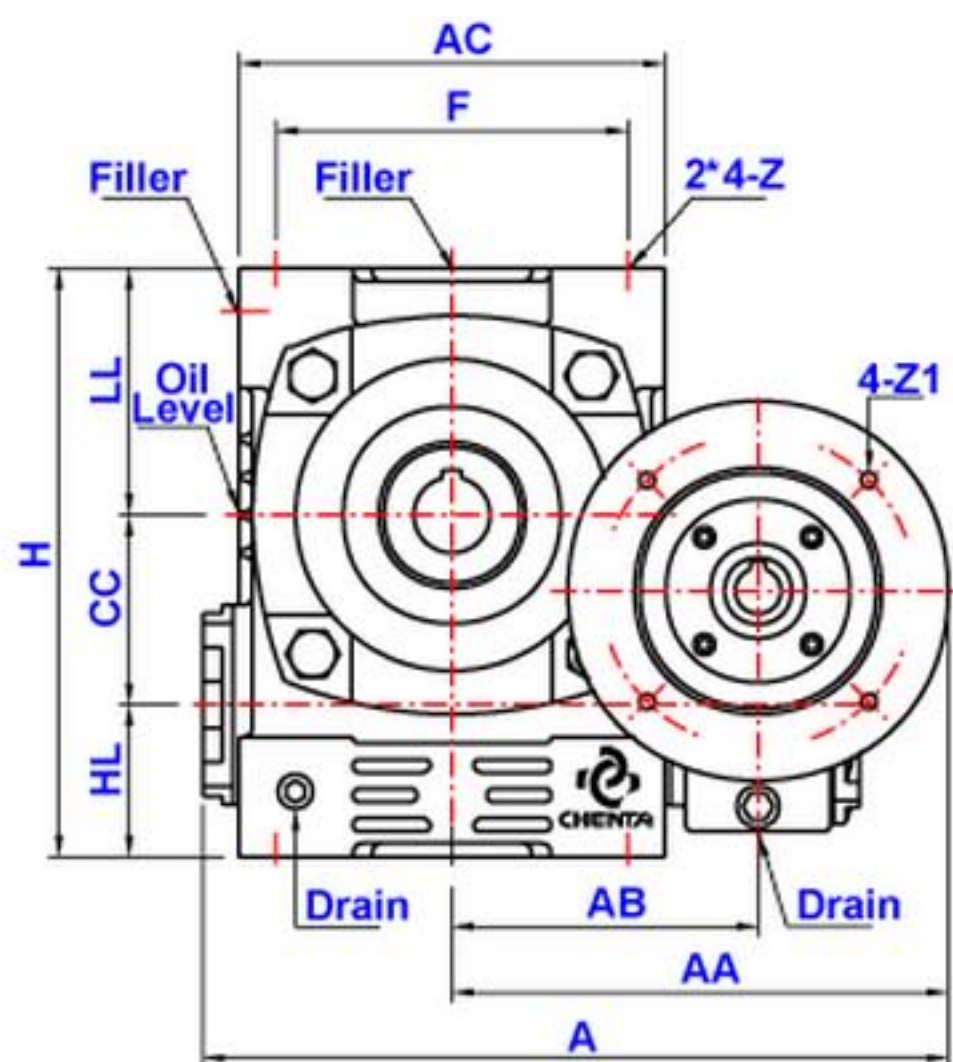

速比：Ratio：1/100 ~ 1/3600

單位：mm

Size	A	AA	AB	AC	F	B	BA	BB	BC	BD	CC	CD	CE	H	HL	LL	Z
40/70	290	193	113	154	125	150	85	130	88	66	70	40	90	205	50	85	3/8 UNC-16
50/80	316	212	132	175	145	212	140	144	97	75	80	50	110	232	60	92	3/8 UNC-16
60/100	374	241	161	224	187	184	97	175	116	91	100	60	140	310	80	130	1/2 UNC-13
70/120	431	272	192	264	232	218	118	200	136	100	120	70	165	370	95	155	5/8 UNC-11
	451	292				220	120										
80/135	481	311	211	295	264	245	130	230	154	111	135	80	185	425	105	185	5/8 UNC-11

Size	Input Bore			Output Bore			Flange					HP	Oil	Weight
	U	T	V	S	W	Y	LA	LB	LC	LE	Z1			
40/70	11	4	12.8	30	8	33.5	130	110	160	4	M8	0.25	0.65	18
50/80	11	4	12.8	35	10	38.5	130	110	160	4	M8	0.25	1.05	24
	14	5	16.3									0.5		
60/100	11	4	12.8	40	12	43.5	130	110	160	4	M8	0.25	1.7	43
	14	5	16.3									0.5		
70/120	14	5	16.3	45	12	48.5	130	110	160	4	M8	0.5	3	74
	19	6	21.8				165	130	200	5	M10	1		
80/135	19	6	21.8	60	15	65	165	130	200	5	M10	1	4.75	87
	24	8	27.3									2		