


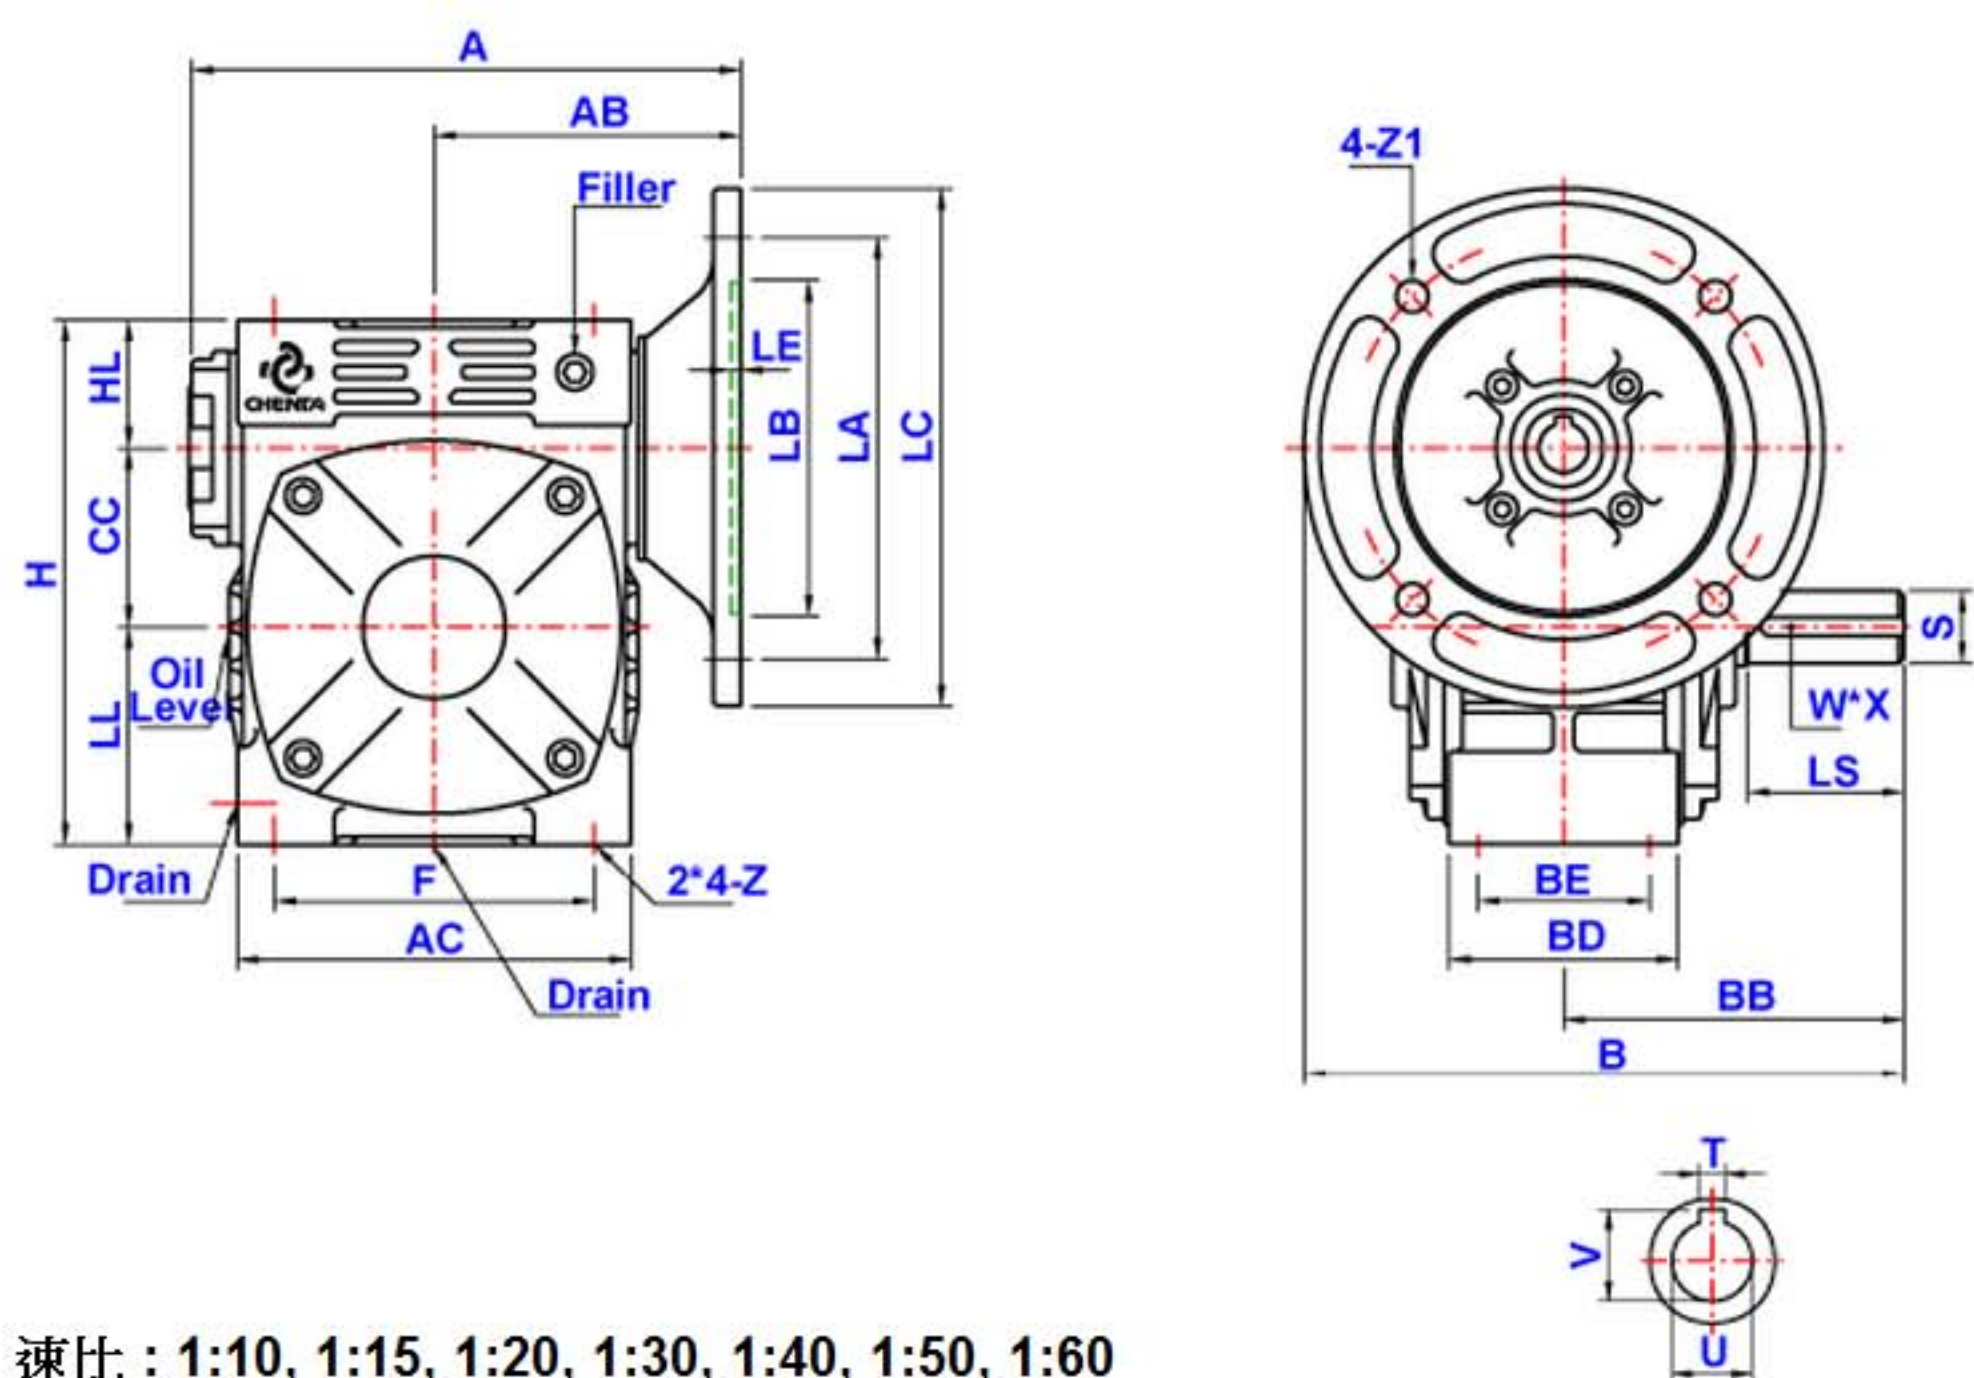

速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Input-Bore

Size	A	AB	AC	B	BB	BD	BE	CC	F	H	HL	LL	Z	Input Bore		
														U	T	V
40	139	85	102	164	84	68	54	40	80	127	34	53	5/16 UNC-18	11	4	12.8
50	174	97	115	175	95	68	50	50	90	150	35	65	5/16 UNC-18	11	4	12.8
														14	5	16.3
60	177	97	127	190	110	78	54	60	100	177	42	75	3/8 UNC-16	11	4	12.8
														14	5	16.3
70	213	118	154	210	130	88	66	70	125	205	50	85	3/8 UNC-16	14	5	16.3
	215	120		230										19	6	21.8
80	235	130	175	240	140	97	75	80	145	232	60	92	3/8 UNC-16	19	6	21.8
														24	8	27.3
100	273	140	224	270	170	116	90	100	187	310	80	130	1/2 UNC-13	24	8	27.3
	275	142		295										28		31.3
120	339	180	264	315	190	136	100	120	232	370	95	155	5/8 UNC-11	28	8	31.3
135	370	195	310	335	210	154	111	135	264	425	105	185	5/8 UNC-11	28	8	31.3
	393	218		360										38	10	41.5

Size	Output Shaft			Flange					HP	Oil	Weight
	LS	S	W * X	LA	LB	LC	LE	Z1			
40	35	16	5 * 3	130	110	160	4	M8	0.25	0.18	6
50	40	17	5 * 3	130	110	160	4	M8	0.25	0.26	7
									0.5		
60	50	22	7 * 4	130	110	160	4	M8	0.25	0.4	9
									0.5		
70	60	28	7 * 4	130	110	160	4	M8	0.5	0.7	16
				165	130	200		M10	1		
80	65	32	10 * 4.5	165	130	200	4	M10	1	1.15	21
									2		
100	75	38	10 * 4.5	165	130	200	5	M10	2	2.2	39
				215	180	250		M12	3		
120	85	45	12 * 4.5	215	180	250	5	M12	3	4.8	52
									5		
135	95	55	12 * 4.5	215	180	250	5	M12	5	6.3	74
				265	230	300		M15	7.5		