


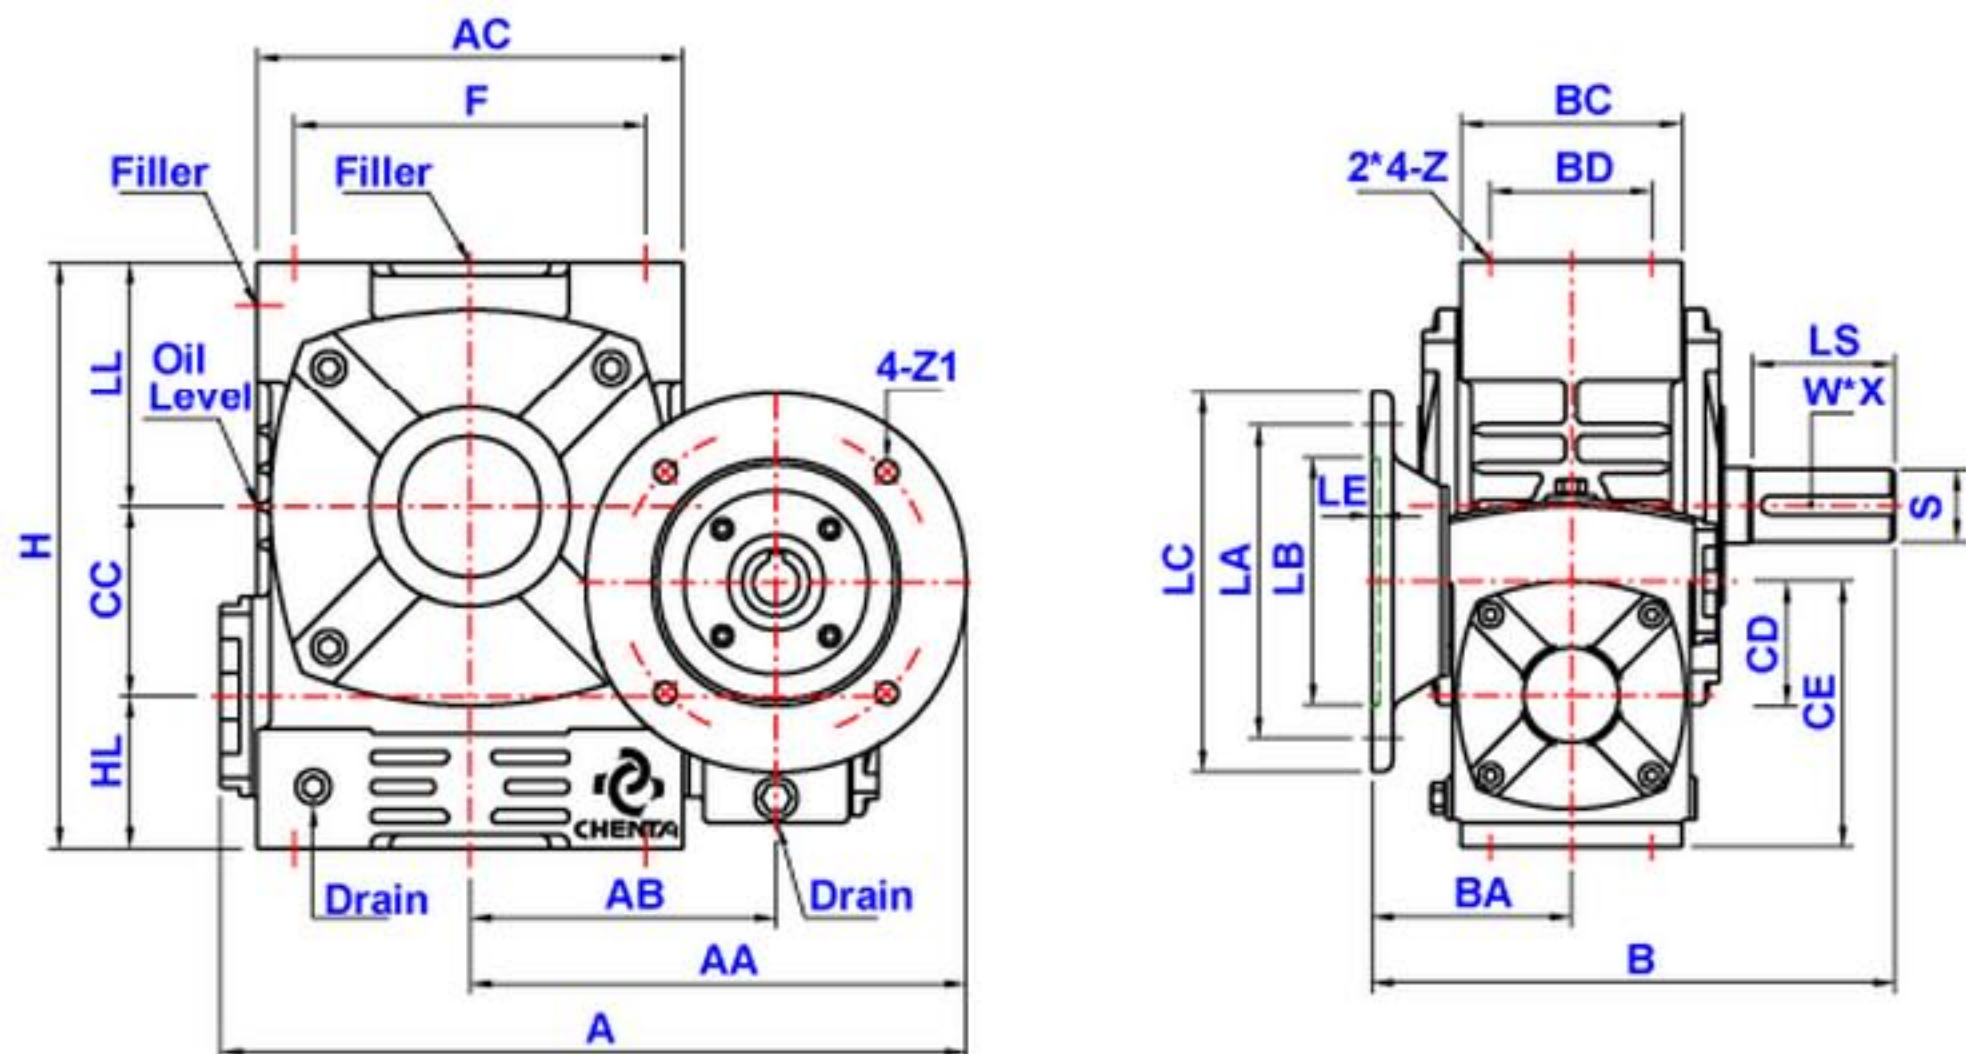

速比：1/100 ~ 1/3600

單位：mm

Input-Bore

Size	A	AA	AB	AC	F	B	BA	BC	BD	CC	CD	CE	H	LL	HL	Z
40/70	290	193	113	154	125	208	78	88	66	70	40	90	205	85	50	3/8 UNC-16
50/80	316	212	132	175	145	280	140	87	75	80	50	110	232	92	60	3/8 UNC-16
60/100	374	241	161	224	187	267	97	116	91	100	60	140	310	130	80	1/2 UNC-13
70/120	431	272	192	264	232	308	118	136	100	120	70	165	370	155	95	5/8 UNC-11
	451	292	310	120												
80/135	481	311	211	295	264	340	130	154	111	135	80	185	425	185	105	5/8 UNC-11

Size	Output Shaft			Flange					Input Bore			HP	Oil	Weight
	LS	S	W * X	LA	LB	LC	LE	Z1	U	T	V			
40/70	60	28	7 * 31	130	110	160	4	M8	11	4	12.8	0.25	0.65	18
50/80	65	32	10 * 35.5	130	110	160	4	M8	11	4	12.8	0.25	1.05	24
									14	5	16.3	0.5		
60/100	75	38	10 * 41.5	130	110	160	4	M8	11	4	12.8	0.25	1.7	43
									14	5	16.3	0.5		
70/120	85	45	12 * 48.5	130	110	160	5	M8	14	5	16.3	0.5	3	74
				165	130	200		M10	19	6	21.8	1		
80/135	95	55	15 * 60.5	165	130	200	5	M10	19	6	21.8	1	4.75	87
									24	8	27.3	2		