


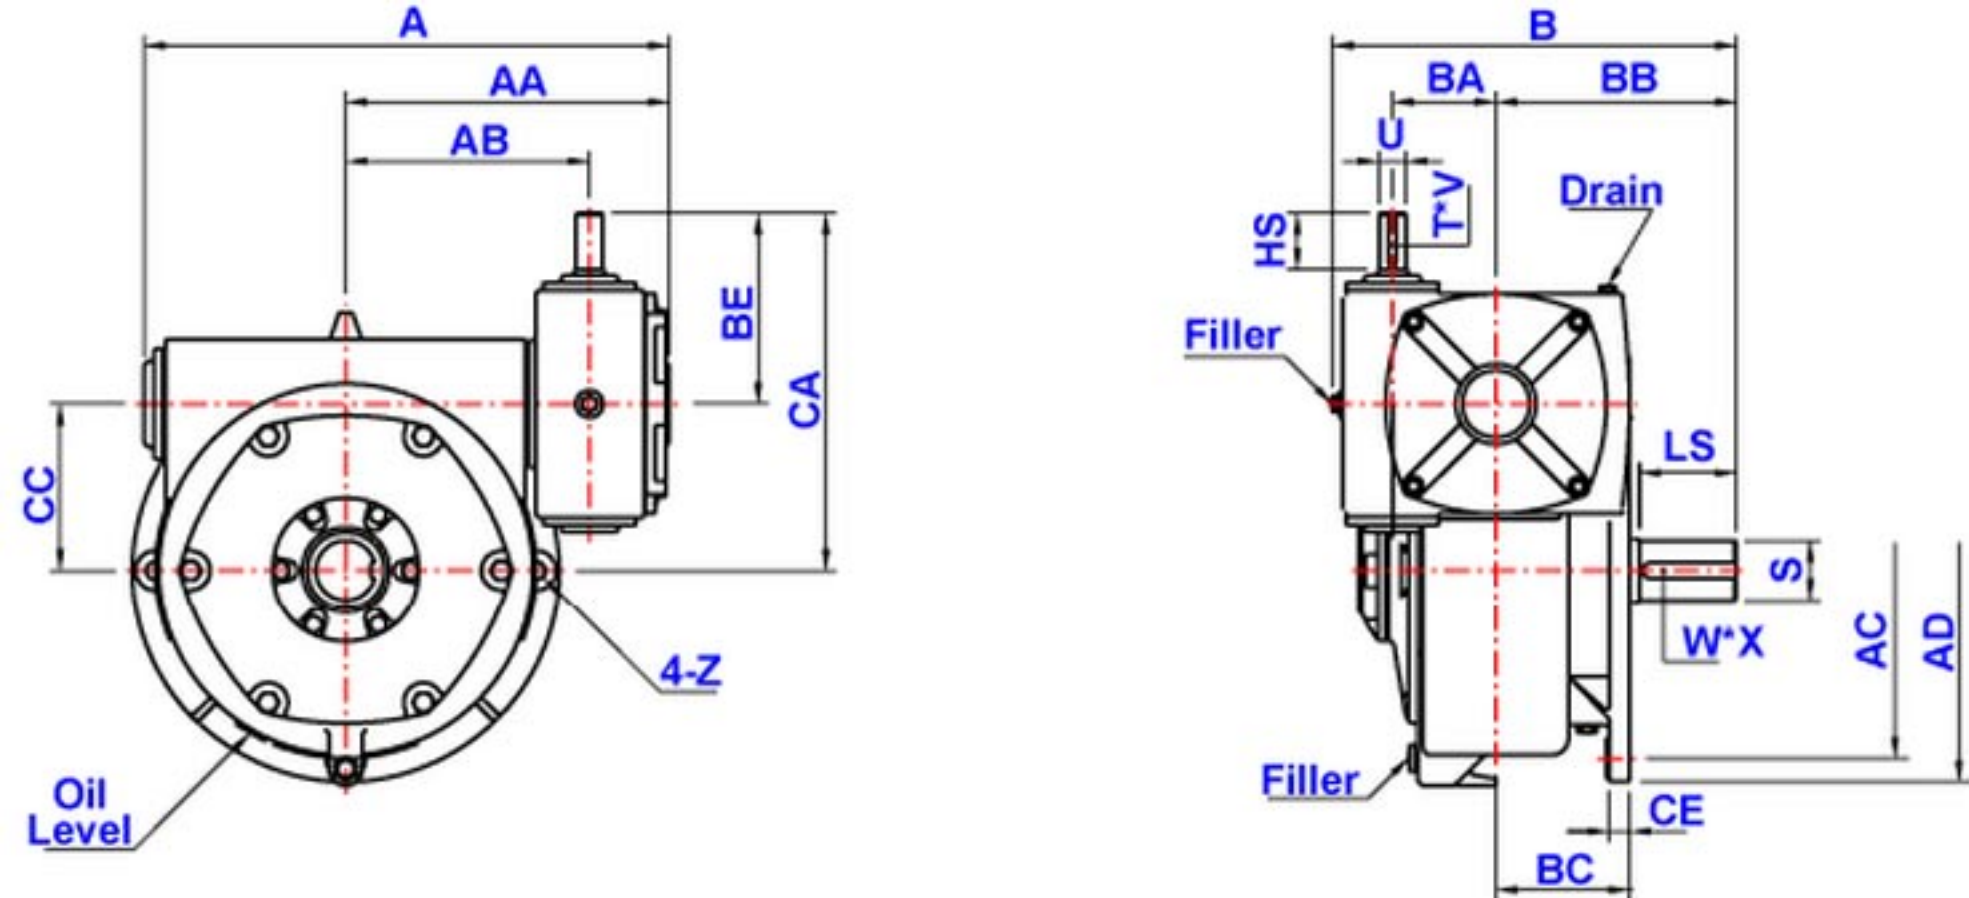

速比：1/100 ~ 1/3600

單位：mm

| Size    | A   | AA  | AB  | AC  | AD  | B   | BA  | BB  | BC  | BE  | CA  | CC  | CE | Z  |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 120/200 | 653 | 414 | 312 | 450 | 510 | 501 | 120 | 305 | 190 | 230 | 430 | 200 | 30 | 22 |
| 135/225 | 672 | 425 | 315 | 510 | 580 | 586 | 135 | 345 | 200 | 260 | 485 | 225 | 35 | 27 |
| 155/250 | 786 | 483 | 365 | 570 | 640 | 605 | 155 | 360 | 200 | 286 | 536 | 250 | 35 | 27 |
| 175/300 | 962 | 601 | 473 | 660 | 750 | 695 | 175 | 410 | 235 | 308 | 608 | 300 | 42 | 36 |

| Size    | Input Shaft |    |          | Output Shaft |    |        | Oil | Weight |
|---------|-------------|----|----------|--------------|----|--------|-----|--------|
|         | HS          | U  | T * V    | LS           | S  | W * X  |     |        |
| 120/200 | 65          | 30 | 7 * 4    | 125          | 70 | 20 * 7 | 19  | 270    |
| 135/225 | 75          | 35 | 10 * 4.5 | 140          | 80 | 20 * 7 | 24  | 375    |
| 155/250 | 85          | 40 | 10 * 4.5 | 145          | 90 | 24 * 8 | 32  | 430    |
| 175/300 | 85          | 45 | 12 * 4.5 | 170          | 95 | 24 * 8 | 55  | 584    |