


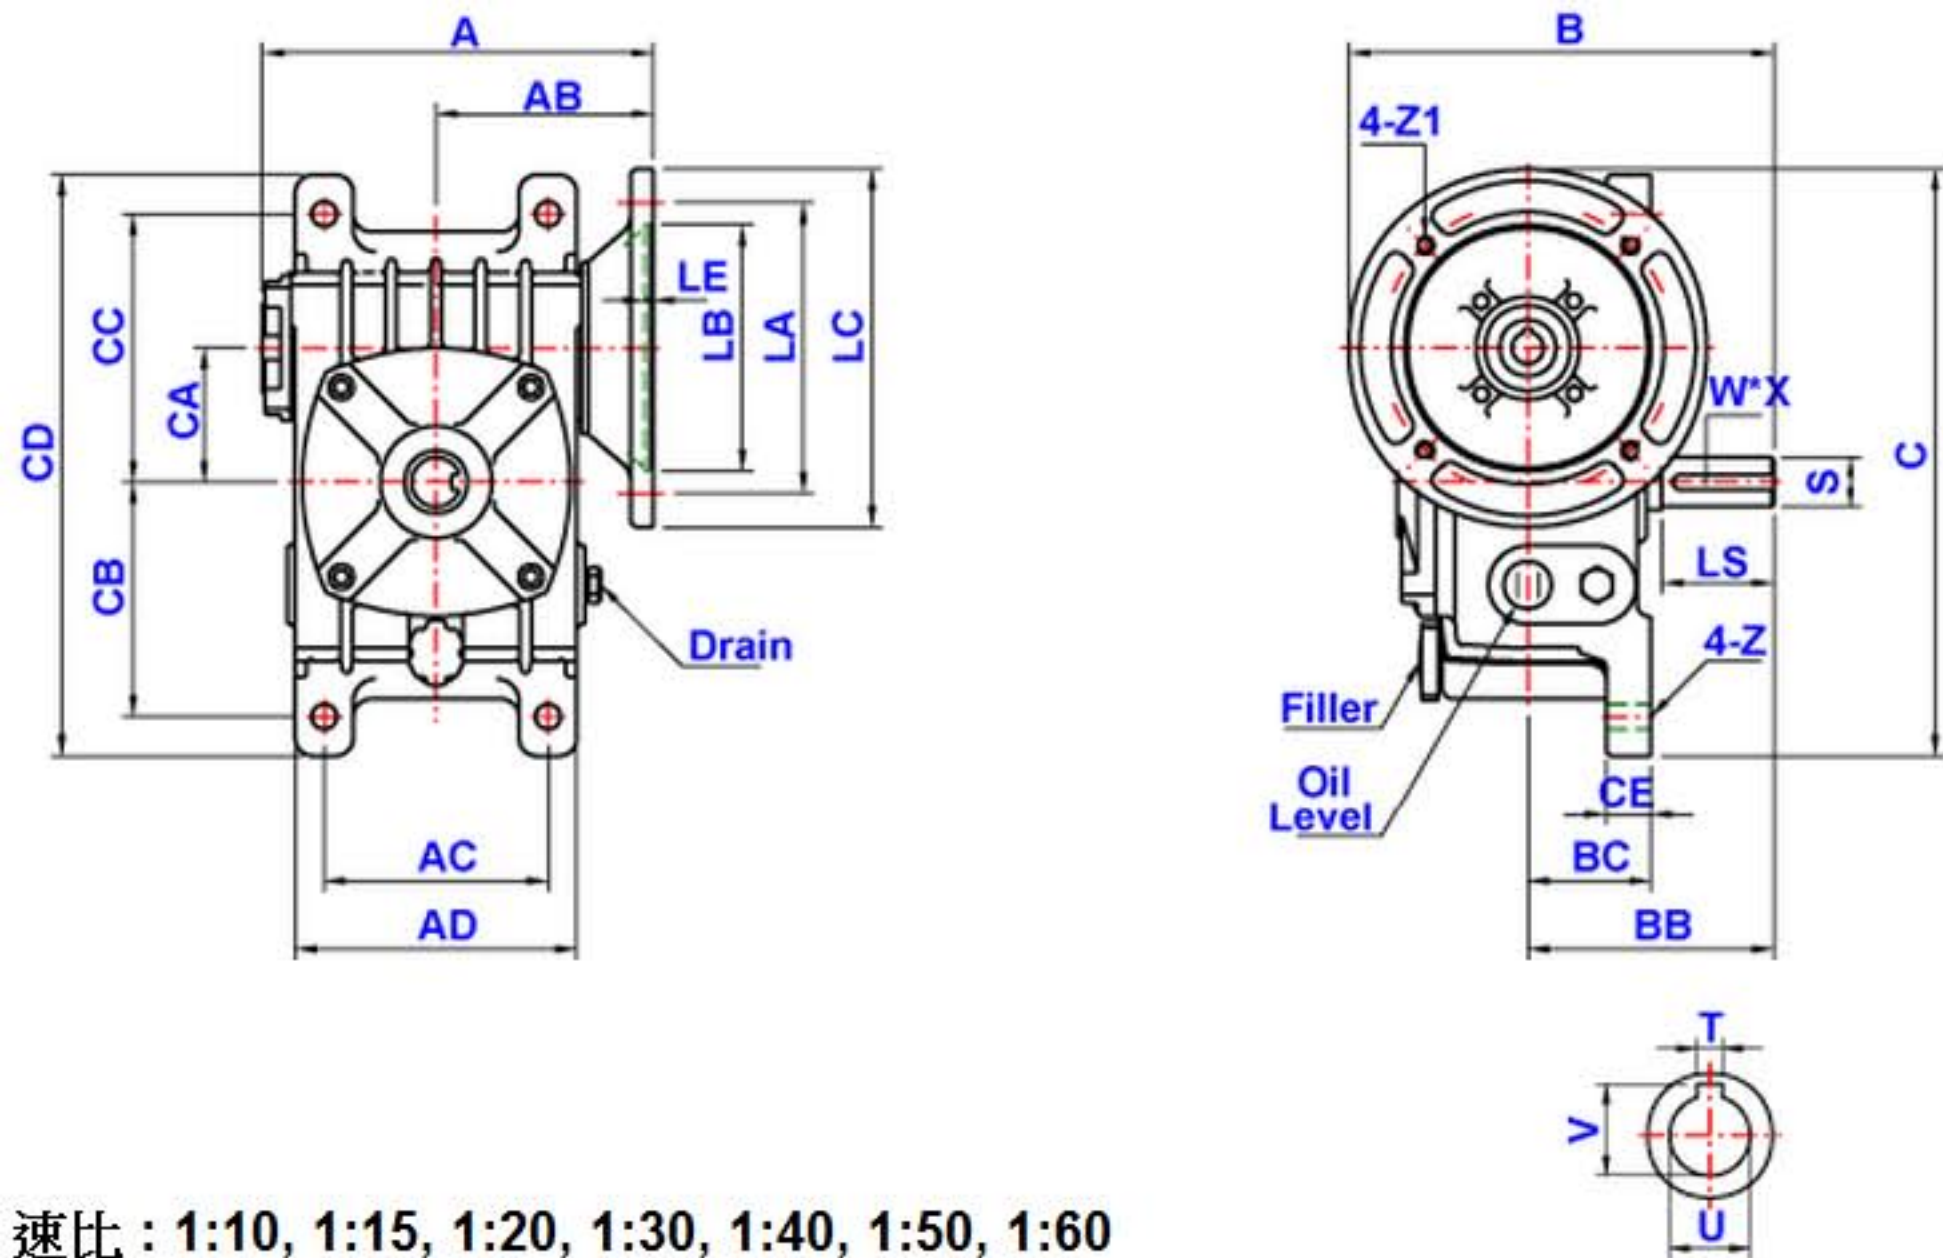

速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Input-Bore

Size	A	AB	AC	AD	B	BB	BC	C	CA	CB	CC	CD	CE	Z	Input Bore		
															U	T	V
50	174	97	90	116	175	95	50	236	50	93	102	220	18	11	11	4	12.8
															14	5	16
60	177	97	100	126	190	110	55	263	60	105	120	260	20	11	11	4	12.8
															14	5	16
70	213	118	120	156	210	130	65	290	70	120	135	295	20	15	14	5	16
	215	120			230			310							19	6	21.8
80	235	130	140	176	240	140	73	330	80	130	150	320	20	15	19	6	21.8
															24	8	27.3
100	273	140	190	226	270	170	90	375	100	155	180	375	30	15	24	8	27.3
	278	142			295			400							28		31.3
120	339	180	220	266	315	190	100	455	120	185	215	450	30	18	28	8	31.3
135	370	195	260	306	335	210	110	495	135	210	235	495	30	18	28	8	31.3
	378	218			360			520							38	10	41.3
155	430	236	290	336	392	242	140	521	155	145	265	456	30	20	38	10	41.3
175	420	212	320	376	398	248	150	552	175	167	293	516	35	20	38	10	41.3
	465	255			423			577							42	12	45.3

Size	Output Shaft			Flange					HP	Oil	Weight
	LS	S	W * X	LA	LB	LC	LE	Z1			
50	40	17	5 * 3	130	110	160	4	M8	0.25	0.4	6.5
									0.5		
60	50	22	7 * 4	130	110	160	4	M8	0.25	0.6	9
									0.5		
70	60	28	7 * 4	130	110	160	4	M8	0.5	1.1	13
				165	130	210	5	M10	1		
80	65	32	10 * 4.5	165	130	200	4	M10	1	1.5	18
									2		
100	75	38	10 * 4.5	165	130	200	4	M10	2	3	42
				215	180	250	5	M12	3		
120	85	45	12 * 4.5	215	180	250	5	M12	3	5	66
									5		
135	95	55	15 * 5	215	180	250	5	M12	5	7.5	90
				265	230	300		15	7.5		
155	100	60	15 * 5	265	230	300	4.5	15	7.5	9.2	115
									10		
175	110	65	8 * 16	265	230	300	5	M12	10	10.5	155
				300	250	350	6	19	15		