




型式 MODEL/GHF 外型尺寸



OUTPUT-SHAFT VIEW
出力軸

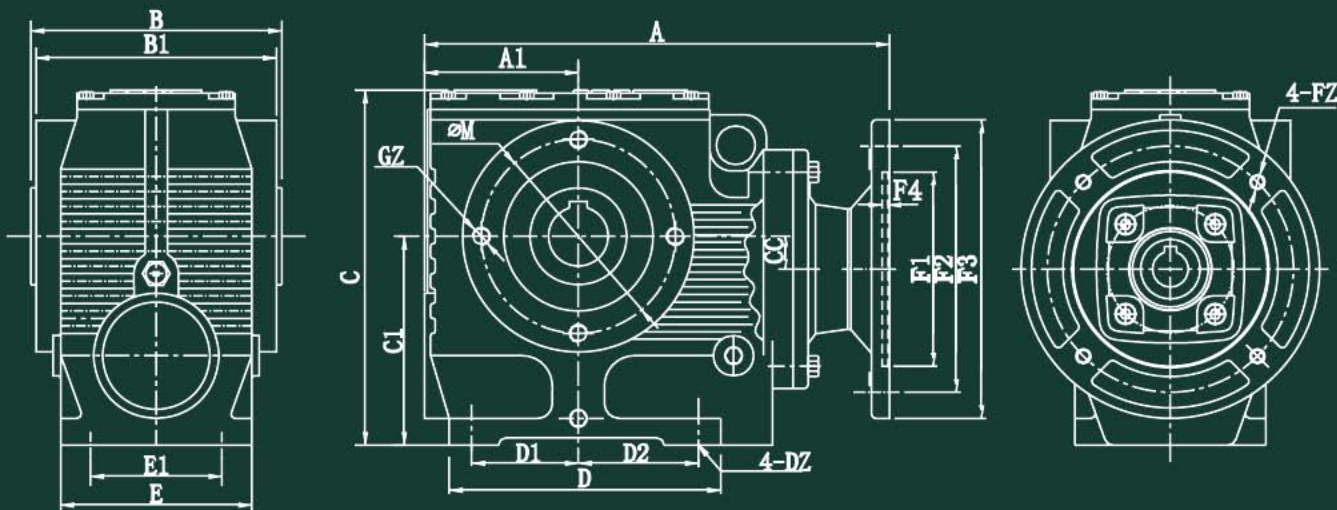

GHF	A1	B	B1	C	C1	CC	D	D1	D2	E	E1	F	ØM	DZ	GZ	OIL(L)
37	63	120	114	143	82	0	113	46	41	85	55	120	75	M8*15L	4-M6*12L	0.25
47	71	120	115	178.5	100	10	128	35	52	95	60	120	115	M10*20L	4-M8*15L	0.4
57	80	150	144	187	112	23.7	146	58.5	58.5	100	60	150	100	M10*20L	8-M8*15L	0.55
67	103	168	161	238	140	22	182	71.5	80.5	128	88	168	130	M12*25L	4-M12*20L	1.1
77	118.5	210	202	301	180	33	200	85	85	154	102	210	155	M16*32L	8-M12*20L	2.0
87	150	250	240	367	225	47	265	115	110	194	118	250	180	M16*32L	8-M16*32L	4.0
97	180	290	280	460	280	53	301	135	113	236	160	290	220	M20*32L	8-M16*32L	7.3

GHF	出力軸 OUTPUT SHAFT				
	ØS	ØQ	L	Y	W
37	20	35	104	22.8	6
47	25	45	105	28.3	8
	30			33.3	
57	30	50	132	33.3	8
	35			38.3	10
67	40	65	144	43.3	12
	45			48.8	14
77	50	80	180	53.8	14
	60			64.4	18
87	60	95	220	64.4	18
	70			74.9	20
97	70	120	260	74.9	20
	90			95.4	25



入力孔
INPUT-BORE VIEW

GHF	入力法蘭 INPUT FLANGE					
	HP	1/4	1/2	1	2	
37	A	196		216		
47	HP	1/4	1/2	1	2	
	A	226		244		
57	HP	1/4	1/2	1	2	
	A	245		263		
67	HP	1/2	1	2	3	5
	A	295.5	311.5		330	
77	HP	1	2	3	5	7.5
	A	341		362.5		411
87	HP	2	3	5	7.5	10
	A	401.5	418		466.5	502.5
97	HP	3	5	7.5	10	15
	A	482		526.5		562.5
						571.5

INPUT BORE 入力孔-入力法蘭				INPUT FLANGE				
HP	ØU	V	T	F1	F2	F3	F4	FZ
1/4	11	12.8	4	110	130	160	4	M8
1/2	14	16.3	5				4	M8
1	19	21.8	6	130	165	200	5	M10
2	24	27.3	8				5	M10
3/5	28	31.3	8	180	215	250	5	M12
7.5/10	38	41.3	10	230	265	300	6	M12
15/20	42	45.3	12	250	300	350	6	M16
25/30	48	51.8	14	300	350	400	6	M16
40	55	59.3	16				6	M16