




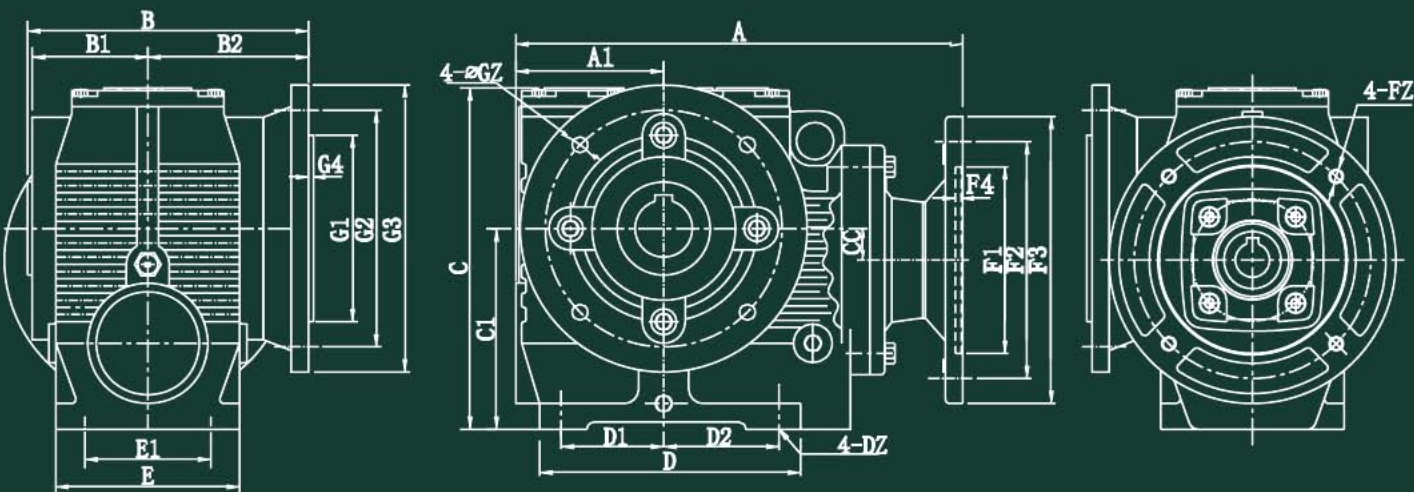

型式 MODEL/GMF 外型尺寸

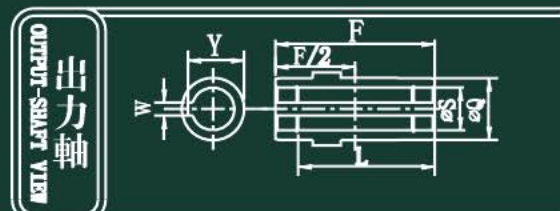


Shaft Direction

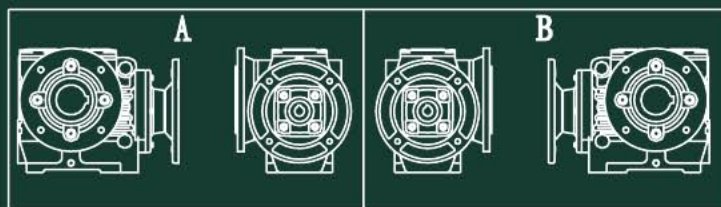

GMF	A1	B	B1	B2	C	C1	CC	D	D1	D2	E	E1	F	DZ	GZ	OIL(L)
37	63	135	57	75	143	82	0	113	46	41	85	55	120	M8*15L	6.6/9	0.27
47	71	141.5	57.5	84	178.5	100	10	128	35	52	95	60	120	M10*20L	9	0.38
57	80	175	72	100	187	112	23.7	146	58.5	58.5	100	60	150	M10*20L	11	0.55
67	103	196	80.5	112	238	140	22	182	71.5	80.5	128	88	168	M12*25L	11	1.1
77	118.5	255	101	150.5	301	180	33	200	85	85	154	102	210	M16*32L	14	2.0
87	150	302.5	120	177.5	367	225	47	265	115	110	194	118	250	M16*32L	18	3.5
97	180	350	140	205	460	280	53	301	135	113	236	160	290	M20*32L	8-17.5	7.1

GMF	出力軸 OUTPUT SHAFT					出力法蘭 OUTPUT FLANGE			
	øS	øQ	L	Y	W	G1	G2	G3	G4
37	20	35	104	22.8	6	80 110	100 130	120 160	3
47	25 30	45	105	28.3 33.3	8	110	130	160	3.5
57	30 35	50	132	33.3 38.3	8 10	130	165	200	3.5
67	40 45	65	144	43.3 48.8	12 14	130	165	200	3.5
77	50 60	80	180	53.8 64.4	14 18	180	215	250	4
87	60 70	95	220	64.4 74.9	18 20	250	300	350	5
97	70 90	120	260	74.9 95.4	20 25	350	400	450	5

GMF	入力法蘭 INPUT FLANGE									
37	HP	1/4	1/2	1	2					
	A			196	216					
47	HP	1/4	1/2	1	2					
	A			226	244					
57	HP	1/4	1/2	1	2					
	A			245	263					
67	HP	1/2	1	2	3	5				
	A	295.5	311.5		330					
77	HP	1	2	3	5	7.5	10			
	A	341		362.5	411					
87	HP	2	3	5	7.5	10	15			
	A	401.5		418	466.5	502.5				
97	HP	3	5	7.5	10	15	20	25	30	40
	A	482		526.5	562.5		571.5			



INPUT BORE 入力孔-入力法蘭				INPUT FLANGE			
HP	øU	V	T	F1	F2	F3	F4 FZ
1/4	11	12.8	4	110	130	160	4 M8
1/2	14	16.3	5				4 M8
1	19	21.8	6	130	165	200	5 M10
2	24	27.3	8				5 M10
3/5	28	31.3	8	180	215	250	5 M12
7.5/10	38	41.3	10	230	265	300	6 M12
15/20	42	45.3	12	250	300	350	6 M16
25/30	48	51.8	14	300	350	400	6 M16
40	55	59.3	16				6 M16