

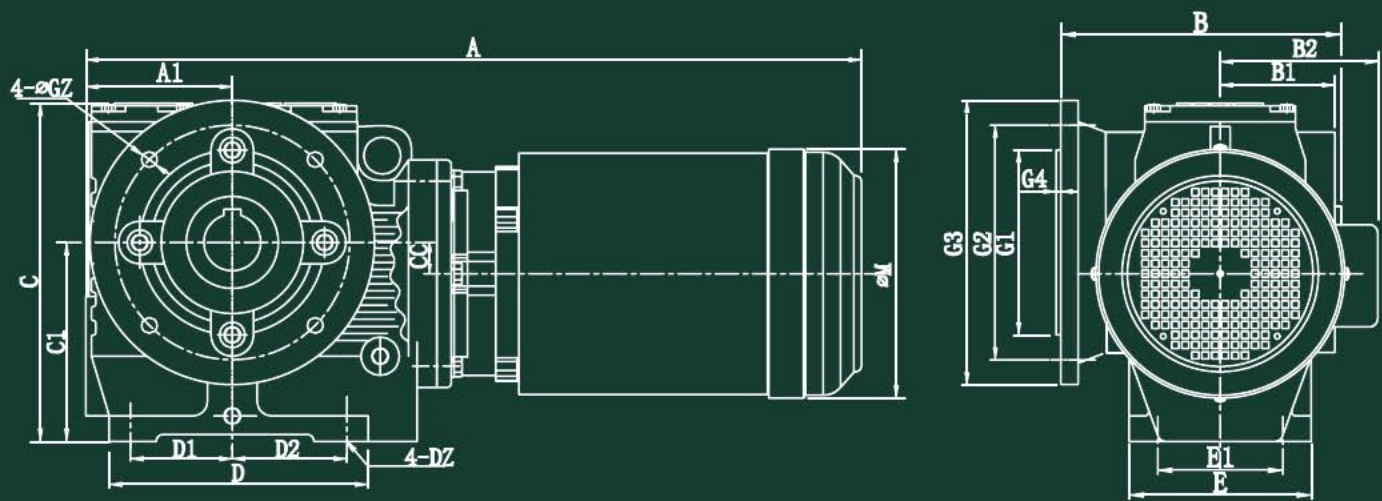


型式 MODEL/GMM 外型尺寸

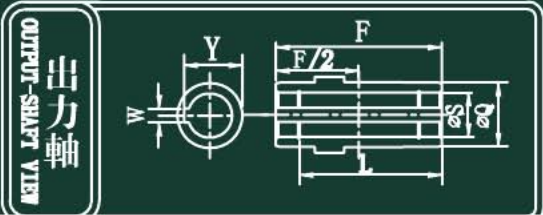

Shaft Direction

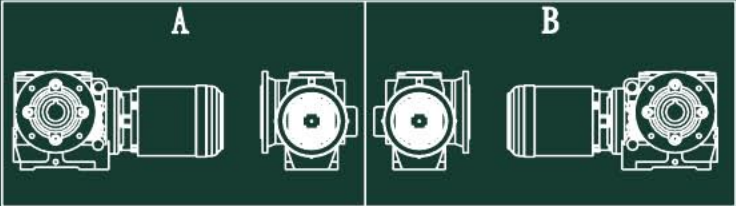

GMM	A1	B	B1	C	C1	CC	D	D1	D2	E	E1	F	DZ	GZ	OIL(L)
37	63	135	57	143	82	0	113	46	41	85	55	120	M8*15L	6.6/9	0.27
47	71	144	57.5	178.5	100	10	128	35	52	95	60	120	M10*20L	9	0.38
57	80	175	72	187	112	23.7	146	58.5	58.5	100	60	150	M10*20L	11	0.55
67	103	196	80.5	238	140	22	182	71.5	80.5	128	88	168	M12*25L	11	1.1
77	118.5	255	101	301	180	33	200	85	85	154	102	210	M16*32L	14	2.0
87	150	302.5	120	367	225	47	265	115	110	194	118	250	M16*32L	18	3.5
97	180	350	140	460	280	53	301	135	113	236	160	290	M20*32L	8-17.5	7.1

GMM	出力軸 OUTPUT SHAFT					出力法蘭 OUTPUT FLANGE			
	ØS	ØQ	L	Y	W	G1	G2	G3	G4
37	20	35	104	22.8	6	80	100	120	3
	25	45	105	28.3	8	110	130	160	
47	30			33.3					3.5
57	30	50	132	33.3	8	130	165	200	3.5
	35			38.3	10				
67	40	65	144	43.3	12	130	165	200	3.5
	45			48.8	14				
77	50	80	180	53.8	14	180	215	250	4
	60			64.4	18				
87	60	95	220	64.4	18	250	300	350	5
	70			74.9	20				
97	70	120	260	74.9	20	350	400	450	5
	90			95.4	25				

GMM	入力馬達 INPUT MOTOR					
	HP	1/4	1/2	1	2	
37	A	356	382	405	448	
47	HP	1/4	1/2	1	2	
	A	383.5	410	433.5	476	
57	HP	1/4	1/2	1	2	
	A	402.5	428.5	452.5	495	
67	HP	1/2	1	2	3	5
	A	479	503	545.5	585	634
77	HP	1	2	3	5	7.5
	A	535.5	578	617.5	667	711
87	HP	3	5	7.5	10	15
	A	673	722.5	767	804.5	873.5
97	HP	3	5	7.5	10	15
	A	737	786	827	865	934
						978
						1003

馬達尺寸 MOTOR DIMENSION		
HP	ØM	B2
1/4	112	116
1/2	132	106
1	156	132
2	175	142
3	192	160
5	219	173
7.5	268	222
10	268	222
15	334	248
20	334	248
25	382	286
30	382	286