




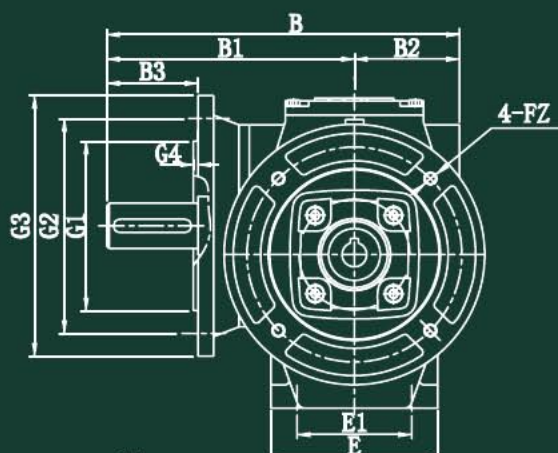

型式 MODEL/GNF 外型尺寸

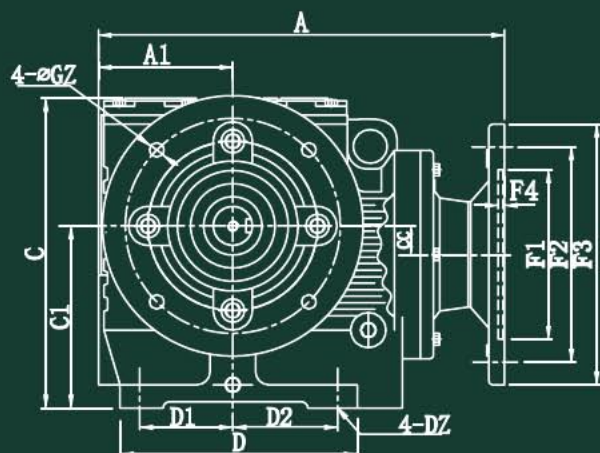

Shaft Direction

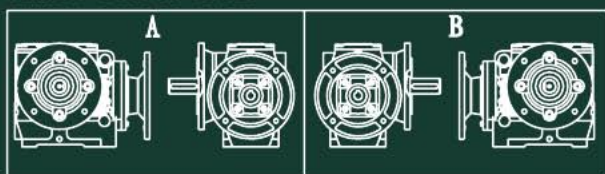

出力軸
OUTPUT-SHAFT VIEW

GNF	A1	B	B1	B2	B3	C	C1	CC	D	D1	D2	E	E1	DZ	GZ	OIL(L)
37	63	172	115	57	40	143	82	0	113	46	41	85	55	M8*15L	6.6/9	0.27
47	71	191	133.5	57.5	50	178.5	100	10	128	35	52	95	60	M10*20L	9	0.38
57	80	232	160	72	60	187	112	23.7	146	58.5	58.5	100	60	M10*20L	11	0.55
67	103	270.5	190	80.5	70	238	140	22	182	71.5	80.5	128	88	M12*25L	11	1.1
77	118.5	341	240	101	90	301	180	33	200	85	85	154	102	M16*32L	14	2.0
87	150	410	290	140	120	367	225	47	265	115	110	194	118	M16*32L	18	3.5
97	180	505	340	165	140	460	280	53	301	135	113	236	160	M20*32L	8-17.5	7.1

GNF	出力法蘭 OUTPUT FLANGE				出力軸 OUTPUT SHAFT						
	G1	G2	G3	G4	ØS	S1	S2	X	W	SZ	
37	80	100	120		20m6	40	32	22.5	6	M6*15L	
	110	130	160	3							
47	110	130	160	3.5	25m6	50	40	28	8	M10*20L	
57	130	165	200	3.5	30m6	60	50	33	8	M10*20L	
67	130	165	200	3.5	35m6	70	60	38	10	M12*25L	
77	180	215	250	4	45m6	90	80	48.5	14	M16*40L	
87	250	300	350	5	60m6	120	110	64	18	M20*70L	
97	350	400	450	5	70m6	140	125	74.5	20	M20*70L	



入力孔
INPUT-BORE VIEW

GNF	入力法蘭 INPUT FLANGE									
	HP	1/4	1/2	1	2					
37	A	196		216						
47	HP	1/4	1/2	1	2					
	A	226		244						
57	HP	1/4	1/2	1	2					
	A	245		263						
67	HP	1/2	1	2	3	5				
	A	295.5		311.5		330				
77	HP	1	2	3	5	7.5	10			
	A	341		362.5		411				
87	HP	2	3	5	7.5	10	15			
	A	401.5		418		466.5	502.5			
97	HP	3	5	7.5	10	15	20	25	30	40
	A	482		526.5		562.5		571.5		

INPUT BORE 入力孔-入力法蘭				INPUT FLANGE				
HP	ØU	V	T	F1	F2	F3	F4	FZ
1/4	11	12.8	4	110	130	160	4	M8
1/2	14	16.3	5				4	M8
1	19	21.8	6	130	165	200	5	M10
2	24	27.3	8				5	M10
3/5	28	31.3	8	180	215	250	5	M12
7.5/10	38	41.3	10	230	265	300	6	M12
15/20	42	45.3	12	250	300	350	6	M16
25/30	48	51.8	14	300	350	400	6	M16
40	55	59.3	16				6	M16