

型式 MODEL / HMM 外型尺寸





A



B

軸 向
Shaft Direction

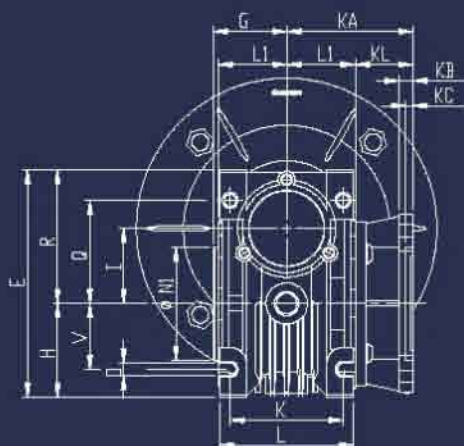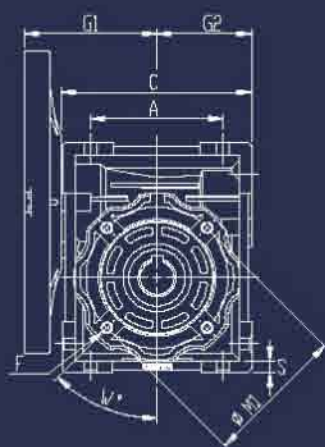


出力軸孔
OUTPUT-BORE VIEW

型號 SIZE	速比 RATIO	A	C	E	F	G	G1	G2	H	I	K	L	L1	M1	N1
30	1/10	54	81	97	4-M6*11	31.5	55	40	40	30	44	56	29	65	55
40	1/15	70	101	121.5	4-M6*8	39	70	50	50	40	60	71	36.5	75	60
50	1/20	80	121	144	4-M8*10	46	80	60	60	50	70	85	43.5	85	70
63	1/25	100	146	174	8-M8*14	56	101	72	72	63	85	103	53	95	80
75	1/30	120	174	205	8-M8*14	60	114.5	86	86	75	90	112	58	115	95
90	1/40	140	208	238	8-M10*18	70	131.5	103	103	90	100	130	67	130	110
110	1/50	170	255	295	8-M10*18	77.5	160	127.5	127.5	110	115	144	74	165	130

型號 SIZE	速比 RATIO	O	Q	R	S	V	W	出力軸孔 Output Bore		
								DH	BH	TH
30	1/10	6.5	44	57	5.5	27	90°	14	5	16.3
40	1/15	6.5	55	71.5	6	35	45°	18	6	20.8
50	1/20	8.5	64	84	7	40	45°	25	8	28.3
63	1/25	8.5	80	102	8	50	45°	25	8	28.3
75	1/30	11	93	119	8	60	45°	28	8	31.3
90	1/40	13	102	135	11	70	45°	35	10	38.3
110	1/50	14	125	167.5	14.5	85	45°	42	12	45.3

型號 SIZE	速比 RATIO	出力法蘭 Output Flange									
		KA	KB	KC	KL	KM	KN	KO	KP	KQ	KW
30	1/10	54.5	6	4	25.5	68	50	6.5	80	70	45°
40	1/15	67	7	4	30.5	75	60	9	110	95	45°
50	1/20	90	9	5	46.5	85	70	11	125	110	45°
63	1/25	98.5	10	6	45.5	150	115	11	180	142	45°
75	1/30	122	14	6	65	165	130	14	205	170	45°
90	1/40	111	13	6	44	175	152	14	210	200	45°
110	1/50	131	15	6	57	230	170	14	280	260	45°

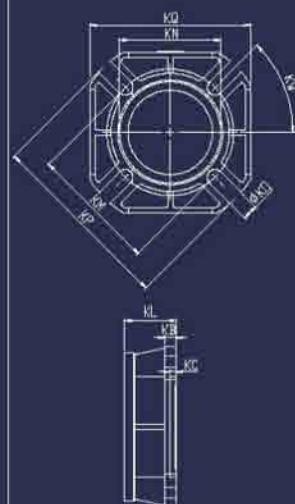

出力法蘭
OUTPUT-FLANGE