




型式 MODEL / MNF 外型尺寸

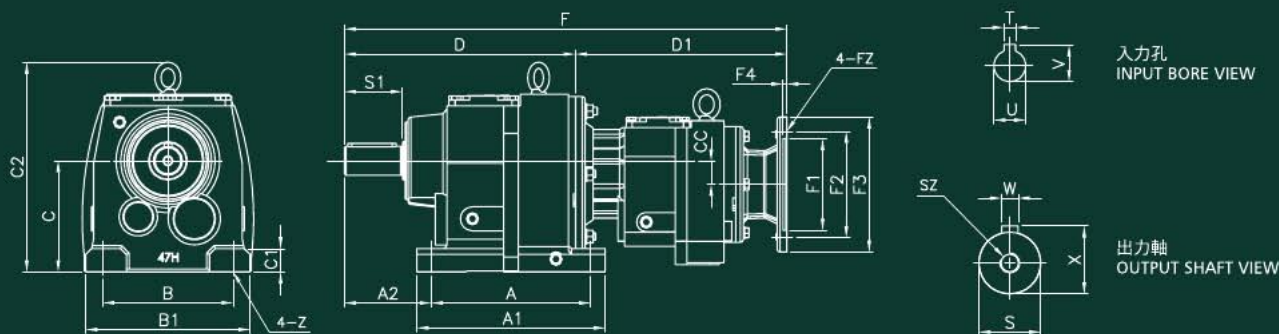

MNF	A	A1	A2	B	B1	C	C1	C2	CC	D	Z	出力軸 OUTPUT SHAFT					
												S	S1	W	X	SZ	Oil (l)
37-47	165	195	90	135	170	115	24	217	24.5	239	14	30k6	60	8	33	M10*20L	1
37-67	195	235	100	150	210	130	30	249	28	279	14	35k6	70	10	38	M12*24L	1.4
37-77	205	245	115	170	230	140	30	266	27	302.5	18	40k6	80	12	43	M16*32L	1.5
47-87	260	310	140	215	290	180	45	335	31.5	372	18	50k6	100	14	53.5	M16*32L	3
47-97	310	365	160	250	340	225	55	416	37.5	440	22	60m6	120	18	64	M20*40L	5.3
77-107	370	440	185	290	400	250	65	465	39	495	26	70m6	140	20	74.5	M20*40L	7.2
77-137	410	490	220	340	450	315	70	550	51	590	33	90m6	170	25	95	M24*48L	11.2
87-147	500	590	260	380	530	355	80	634	70	697.5	39	110m6	210	28	116	M24*48L	17.7

MNF	入力法蘭 MOUNTING FLANGE							
	HP	1/4	1/2	1	2			
37-47	F	458		476				
	D1	219		237				
	HP	1/4	1/2	1	2			
37-67	F	496		514				
	D1	217		235				
	HP	1/4	1/2	1	2			
37-77	F	494		532				
	D1	191.5		229.5				
	HP	1/4	1/2	1	2	3	5	
47-87	F	613.5		631.5		648		
	D1	241.5		259.5		276		
	HP	1/4	1/2	1	2	3	5	
47-97	F	673.5		691.5		708		
	D1	233.5		251.5		268		
	HP	1	2	3	5	7.5	10	
77-107	F	793.5		810		858.5		
	D1	298.5		315		363.5		
	HP	1	2	3	5	7.5	10	
77-137	F	877.5		894		942.5		
	D1	287.5		304		352.5		
	HP	2	3	5	7.5	10	15	
87-147	F	1025		1041.5		1090		1126
	D1	327.5		344		392.5		428.5

入力孔 INPUT BORE				入力法蘭 MOUNTING FLANGE				
HP	U	V	T	F1	F2	F3	F4	FZ
1/4	11	12.8	4	110	130	160	4	M8
1/2	14	16.3	5					
1	19	21.8	6	130	165	200	5	M10
2	24	27.3	8					
3	28	31.3	8	180	215	250	5	M12
5	28	31.3	8					
7.5	38	41.3	10	230	265	300	6	M12
10	38	41.3	10					
15	42	45.3	12					
				250	300	350	6	M16