


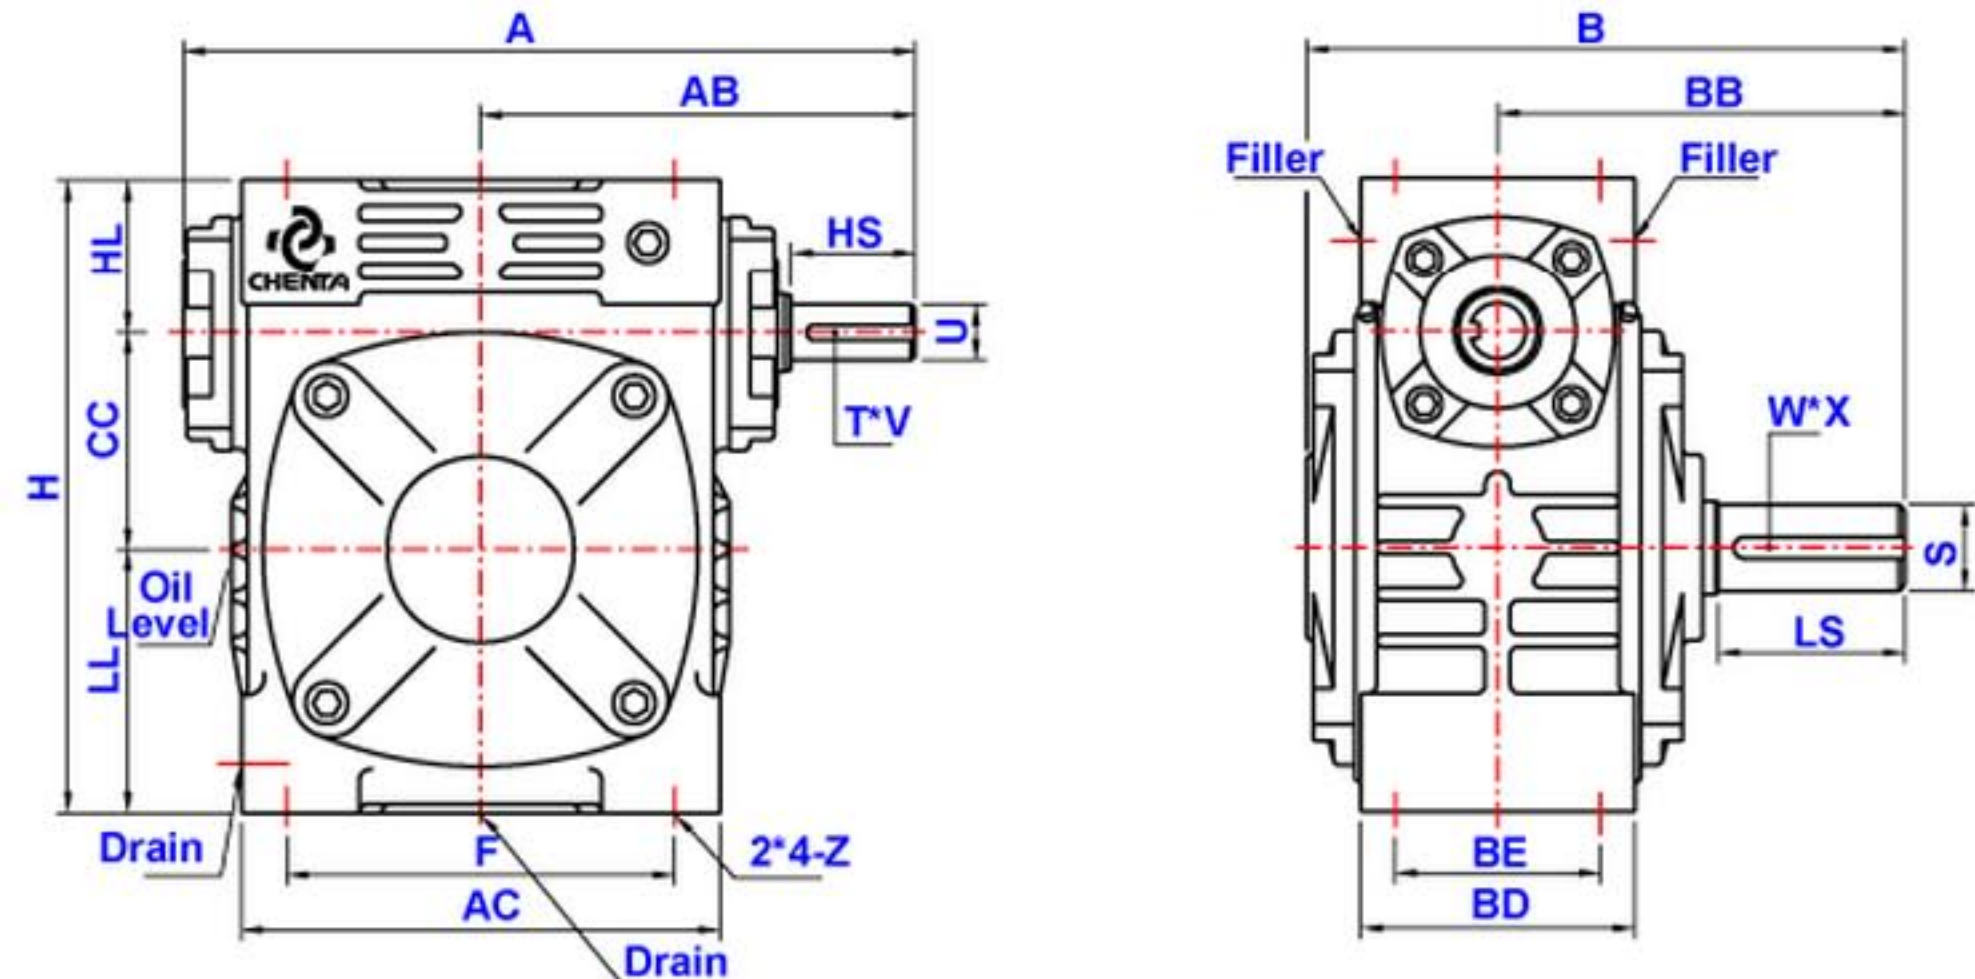

速比：1:10, 1:15, 1:20, 1:30, 1:40, 1:50, 1:60

單位：mm

Size	A	AB	AC	B	BB	BD	BE	CC	F	H	HL	LL	Z
40	157	96.5	102	126	84	68	54	40	80	127	34	53	5/16-18 UNC
50	181	107	115	147	95	68	50	50	90	150	35	65	5/16-18 UNC
60	204	124	127	168	110	78	54	60	100	177	42	75	3/8-16 UNC
70	234	140	154	196	130	88	66	70	125	205	50	85	3/8-16 UNC
80	265	160	175	216	140	97	75	80	145	232	60	92	3/8-16 UNC
100	325	192	224	262	170	116	91	100	187	310	80	130	1/2-13 UNC
120	389	230	264	291	190	136	100	120	232	370	95	155	5/8-11 UNC
135	435	260	310	320	210	154	111	135	264	425	105	185	5/8-11 UNC

Size	Input Shaft			Output Shaft			Oil	Weight
	HS	U	T * V	LS	S	W * X		
40	28	12	4 * 2.5	35	16	5 * 3	0.18	5
50	30	12	4 * 2.5	40	17	5 * 3	0.26	6
60	40	15	5 * 3	50	22	7 * 4	0.4	8
70	40	18	5 * 3	60	28	7 * 4	0.7	14
80	50	22	7 * 4	65	32	10 * 4.5	1.15	19
100	50	25	7 * 4	75	38	10 * 4.5	2.2	36
120	65	30	7 * 4	85	45	12 * 4.5	4.8	48
135	75	35	10 * 4.5	95	55	15 * 5	6.3	70