



型式 MODEL / MXF 外型尺寸

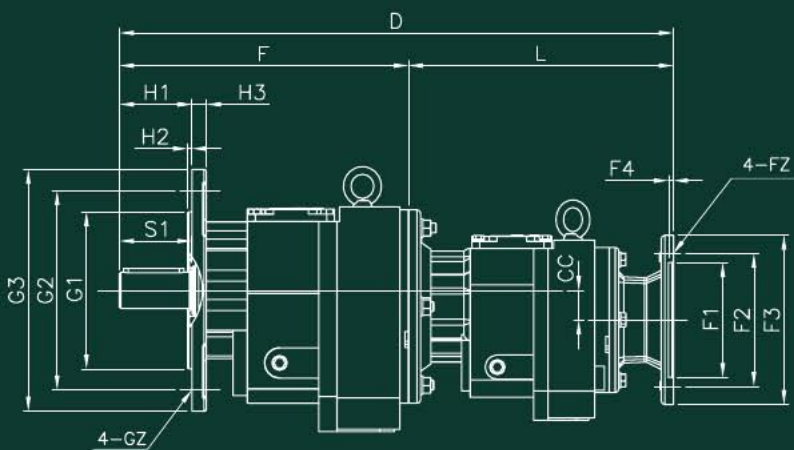

入力孔
INPUT BORE VIEW



出力軸
OUTPUT SHAFT VIEW

MXF	G1	G2	G3	GZ	H1	H2	H3	CC	F	出力軸 OUTPUT SHAFT					
										S	S1	W	X	SZ	Oil (l)
37-47	130h7	165	200	11	60	3.5	12	24.5	239	30k6	60	8	33	M10*20L	2.7
37-67	180h7	215	250	9	70	4	15	28	279	35k6	70	10	38	M12*24L	4.65
37-77	230h7	265	300	14	80	4	21	27	302.5	40k6	80	12	43	M16*32L	5.15
47-87	250h7	300	350	18	100	5	21	31.5	372	50k6	100	14	53.5	M16*32L	9.35
47-97	350h7	400	450	18	120	5	25	37.5	440	60m6	120	18	64	M20*40L	15.65
77-107	350h7	400	450	18	140	5	25	39	495	70m6	140	20	74.5	M20*40L	23.3
77-137	450h7	500	550	18	170	5	28	51	590	90m6	170	25	95	M24*48L	36.6
87-147	450h7	500	550	18	210	5	28	70	697.5	110m6	210	28	116	M24*48L	59.7

MXF	入力法蘭 MOUNTING FLANGE						
	HP	1/4	1/2	1	2		
37-47	D	458		476			
	L	219		237			
	HP	1/4	1/2	1	2		
37-67	D	496		514			
	L	217		235			
	HP	1/4	1/2	1	2		
37-77	D	494		532			
	L	191.5		229.5			
	HP	1/4	1/2	1	2	3	5
47-87	D	613.5		631.5		648	
	L	241.5		259.5		276	
	HP	1/4	1/2	1	2	3	5
47-97	D	673.5		691.5		708	
	L	233.5		251.5		268	
	HP	1	2	3	5	7.5	10
77-107	D	793.5		810		858.5	
	L	298.5		315		363.5	
	HP	1	2	3	5	7.5	10
77-137	D	877.5		894		942.5	
	L	287.5		304		352.5	
	HP	2	3	5	7.5	10	15
87-147	D	1025		1041.5		1090	1126
	L	327.5		344		392.5	428.5

入力孔 INPUT BORE				入力法蘭 MOUNTING FLANGE					
HP	U	V	T	F1	F2	F3	F4	FZ	
1/4	11	12.8	4	110	130	160	4	M8	
1/2	14	16.3	5						
1	19	21.8	6	130	165	200	5	M10	
2	24	27.3	8						
3	28	31.3	8	180	215	250	5	M12	
5	28	31.3	8						
7.5	38	41.3	10	230	265	300	6	M12	
10	38	41.3	10						
15	42	45.3	12						

Unit:mm